

RAČUNARSKE PERIFERIJE I INTERFEJSI

O PREDMETU

Studijski programi za koje se organizuje :

-Specijalističke studije Elektrotehnike, studijski program Elektronika, Telekomunikacije i Računari (ETR), smjer Elektronika.

Uslovljenost drugim predmetima: Nema formalnih uslova.
Podrazumijeva se poznavanje C/C++ jezika.

Ciljevi izučavanja predmeta: Interfejsi (međusklopovi) i periferije (spoljni uređaji) povezuju računare sa spoljašnjom sredinom. Cilj ovog predmeta je da studenti ovladaju znanjem i tehnikama, pomoću kojih će moći da uz pomoć računara (automatski) prikupljaju informacije iz spoljašnjeg svijeta i da upravljaju procesima van računara. Osim teoretskog dijela, značajna pažnja se poklanja praktičnom radu.

Metod nastave i savladanja gradiva: Predavanja, računske vježbe i vježbe u računarskoj učionici / laboratoriji. Učenje i samostalna izrada praktičnih zadataka. Konsultacije.

O PREDMETU

Sadržaj predmeta:

| | |
|-------------------|---|
| Pripremna sedmica | Priprema i upis semestra |
| I sedmica | Uvod; Upoznavanje sa predmetom, ciljevima i načinom rada; |
| II sedmica | Mikrokontroleri; Razvojne ploče; Arduino Uno; |
| III sedmica | Izlazni portovi (Sedmosegmentni i LCD displeji); |
| IV sedmica | Ulazni portovi; |
| V sedmica | Analogni ulazi i izlazi; |
| VI sedmica | Koračni motori; |
| VII sedmica | Optički interfejsi; |
| VIII sedmica | <i>Provjera znanja</i> |
| IX sedmica | Servo motori; |
| X sedmica | Daljinski upravljači; |
| XI sedmica | Senzori; |
| XII sedmica | Komunikacioni interfejsi: -paralelni, -serijski; |
| XIII sedmica | Wi-Fi; |
| XIV sedmica | Modemi: dial-up, govorni, adsl, gprs; AT komande; |
| XV sedmica | Interfejsi u industriji; Vizuelizacija industrijskih procesa; |
| XVI sedmica | <i>Završni ispit</i> |
| Završna sedmica | Ovjera semestra i upis ocjena |
| XVIII-XXI sedmica | Dopunska nastava i popravni ispitni rok |

O PREDMETU

Opterećenje studenata na predmetu

Sedmično

6 kredita x 40/30 = 8 časova

Struktura:

3 časa predavanja

1 čas računskih vježbi

**4 časa samostalnog rada,
uključujući konsultacije**

U toku semestra

Nastava i završni ispit: (8 časova) x 16 = 128 časova

**Neophodne pripreme prije početka semestra
(administracija, upis, ovjera)**

2 x (8 časova) = 16 časova

Ukupno opterećenje za predmet 6x30 = 180 časova

Dopunski rad za pripremu ispita u popravnom
ispitnom roku, uključujući i polaganje popravnog ispita
od 0 do 30 časova (preostalo vrijeme od prve dvije
stavke do ukupnog opterećenja za predmet 150
časova)

Struktura opterećenja:

**128 časova (Nastava)+16 časova (Priprema)+36
časova (Dopunski rad)**

Studenti su obavezni da pohađaju nastavu, rade i predaju sve domaće zadatke, odrade
laboratorijske vježbe i obje provjere znanja.

O PREDMETU

Literatura:

Osnovna i pomoćna literatura u elektronskom obliku na www.ucg.ac.me/etf

Praktični zadaci za laboratorijske vježbe na www.ucg.ac.me/etf

Z.Mijanović i ostali, »Računarski interfejsi i periferije«, Univerzitet Crne Gore

Oblici provjere znanja i ocjenjivanje:

- Bodovi na vjezbama 26 poena
- Provjera znanja 24 poena
- Završni ispit 50 poena.
- Prelazna ocjena se dobija ako se kumulativno sakupi najmanje 50 poena.

Što je mikrokontroler?



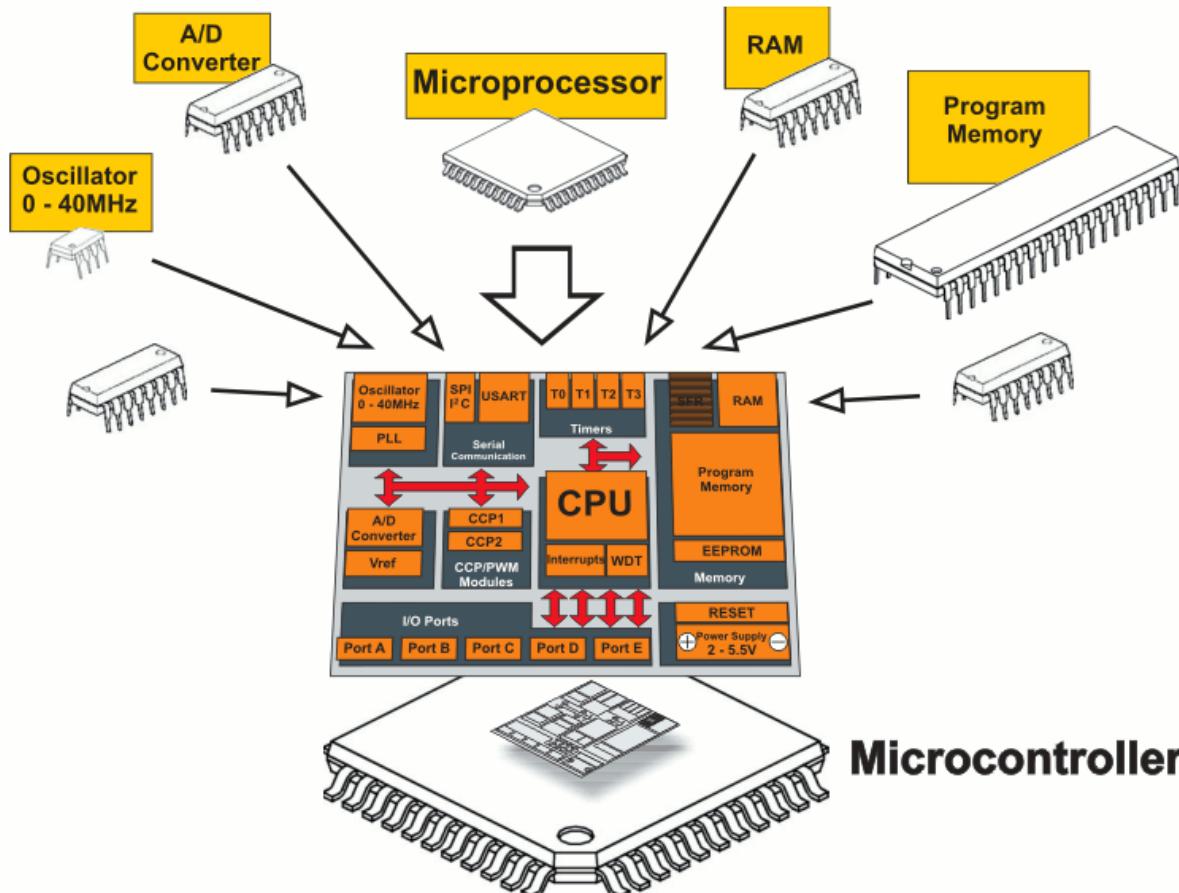


Fig. 0-1 Microcontroller versus Microprocessor

- Mali kompjuter u jednom čipu
 - Sadrži procesor, memoriju, i ulaze/izlaze
- Tipično je „**ugrađen**“ unutar nekih uređaja i kontroliše njihov rad
- Mikrokontroler je često mali i jeftin.

Što je mikrokontroler?

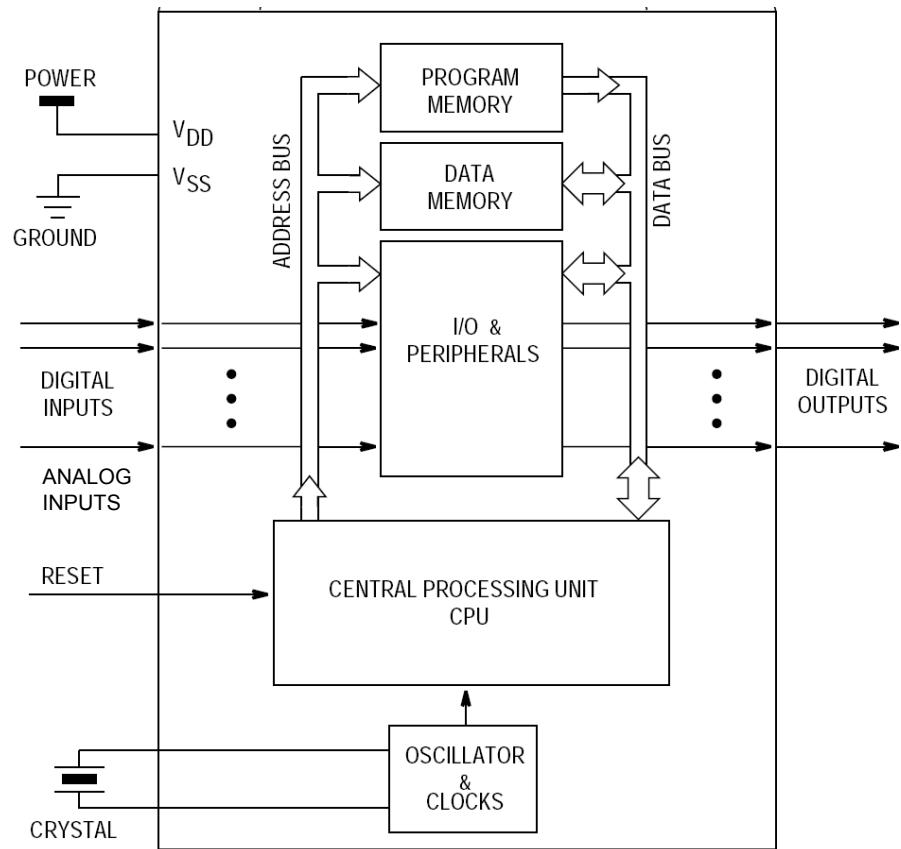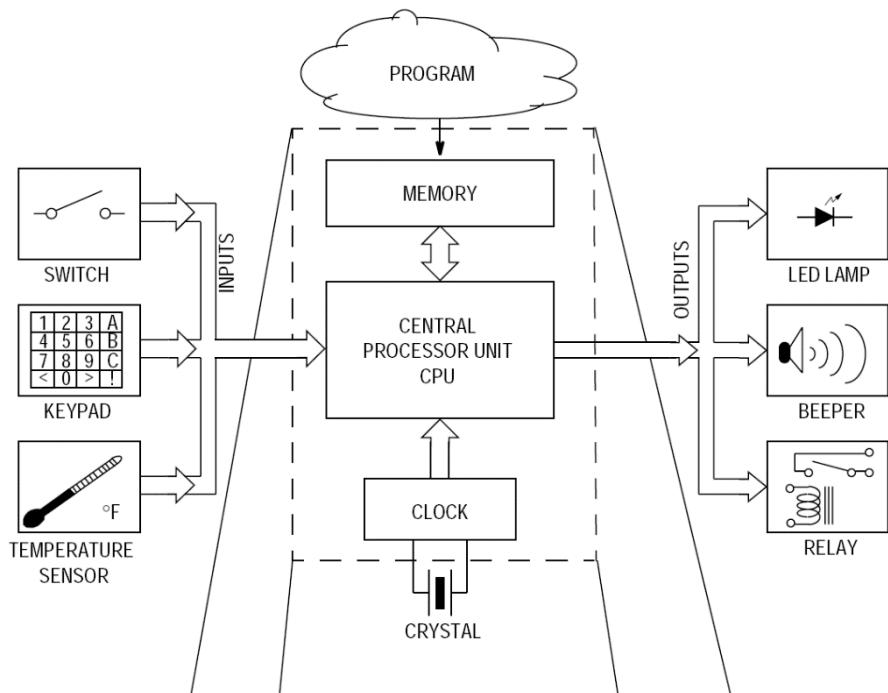


Što je razlika između ‘Digital Input’ i ‘Analog Input’?

Mikrokontroleri – definicija

- Programeri rade u virtuelnom svijetu.
- Uređaji rade u fizičkom svijetu.
- Kako povezati vituelni i fizički svijet?
- Uvedite mikrokontroler.
- Mikrokontroler je u osnovi mali računar koji posjeduje programabilne ulaze i izlaze opšte namjene.
- Ulazi mogu biti upravljeni od strane fizičkog okruženja dok izlazi mogu upravljati fizičkim okruženjem.

Što je razvojna ploča?

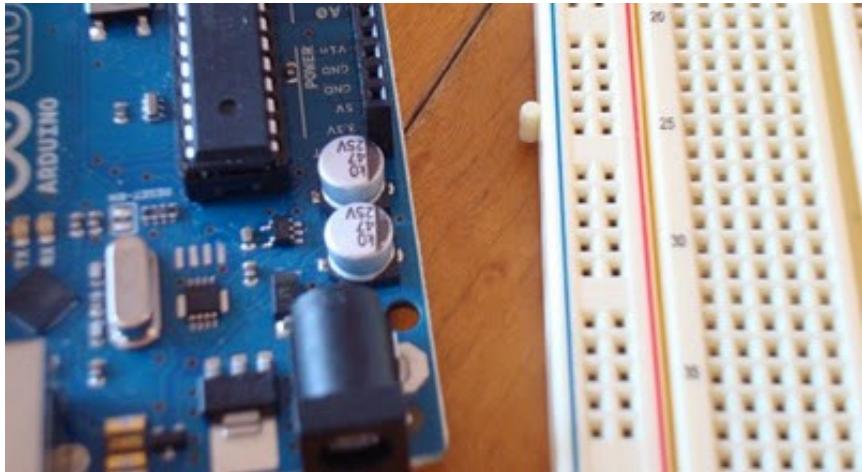

- Štampana matična ploča dizajnirana da olakša rad sa mikrokontrolerom
- Razvojna ploča tipično uključuje:
 - napojno kolo;
 - programerski interfejs;
 - Lako dostupne ulazno/izlazne pinove.

Arduino – Zvanična definicija

- Uzeto sa zvaničnog web sajta (arduino.cc):
 - Arduino je open-source elektronska prototipna platforma zasnovana na fleksibilnom, jednostavnom za upotrebu, hardveru i softveru.
 - Namijenjen je dizajnerima, hobistima, i svima drugima koji su zainteresovani za kreiranje interaktivnih objekata i okruženja.


Zašto Arduino?

- Bez obzira na razlog, Arduino platforma je postala de-fakto standard.
 - Postoji puno realizovanih, dostupnih, projekta koji koriste arduino platformu.
- Teži ravnoteži između jednostavnosti upotrebe i korisnosti.
 - Programske jezice se uglavnom vide kao glavna poteškoća.
 - Arduino C je značajno uproštena verzija C++.
- Nije skup.

Tipovi Arduino-a


- Više različitih verzija
 - Broj ulaznih/izlaznih kanala
 - Oblik (gabariti)
 - Procesorska snaga

- Leonardo
- Due
- Micro
- LilyPad
- Esplora
- Uno

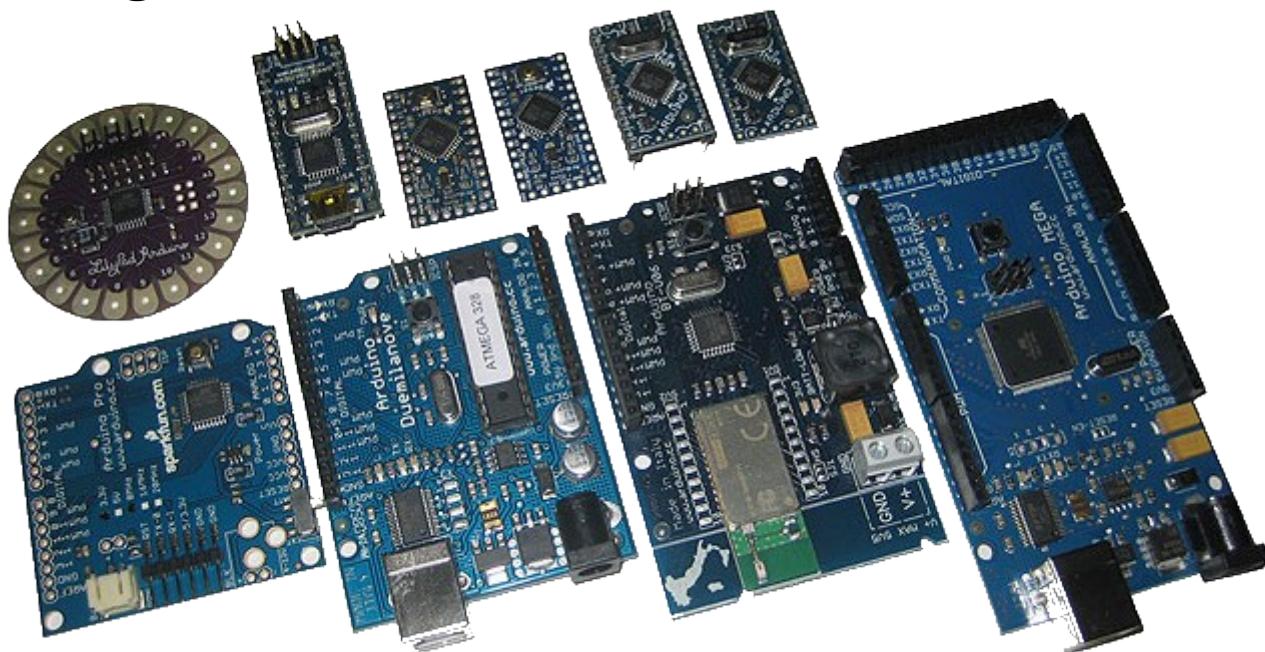


Leonardo

- U poređenju sa Uno, malo unaprijedjen.
- Koristi ATmega32u4 mikrokontroler koji ima ugrađenu USB komunikaciju
 - Nema potrebe za dodatnim mikrokontrolerom
 - Može se prikazati PC-u kao miš ili tastatura

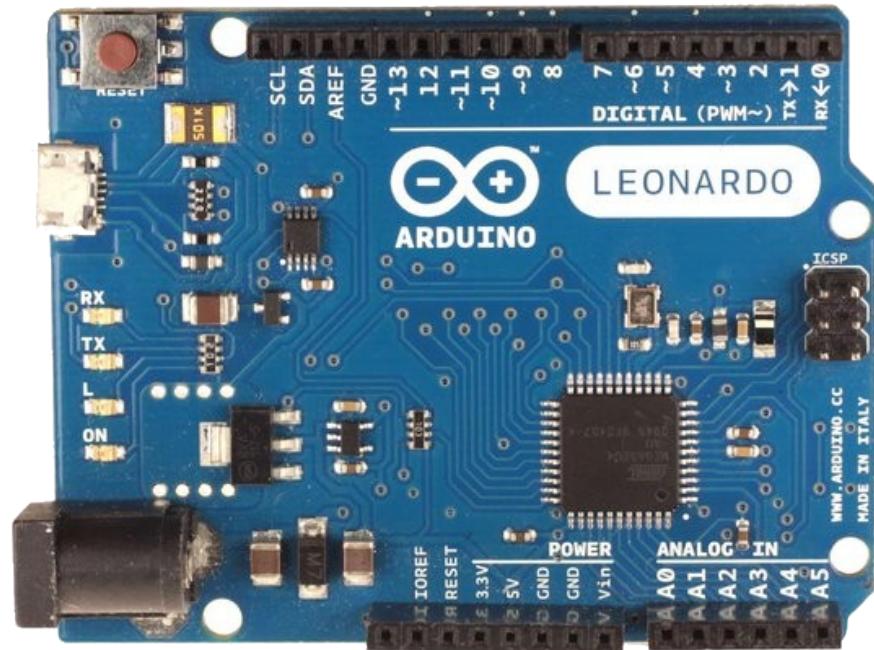


Due

- Mnogo brži procesor, mnogo više pinova
- Radi na 3.3 volta
- Izgledom sličan Mega

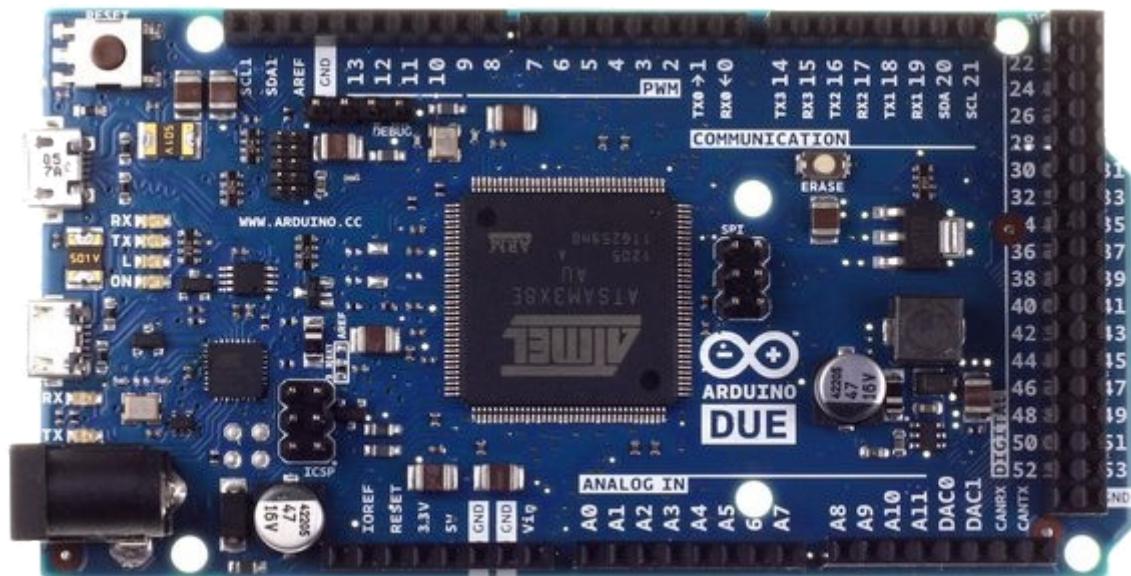

Micro

- Kad je veličina važna: Micro, Nano, Mini
- Uključuju sve funkcionalnosti Leonardo-a

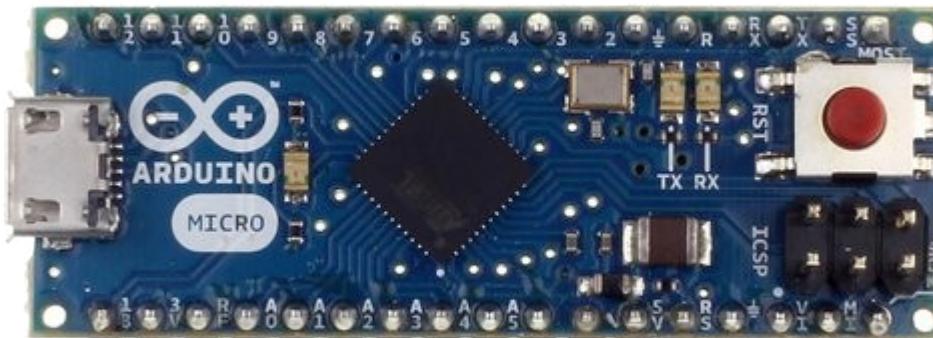


LilyPad

- LilyPad je pogodan za primjenu na odjeći.




Esplora

- Game controller
- Sadrži džojstik, četiri tastera, linearni potenciometar (klizač), mikrofon, svjetlosni senzor, senzor temperature, tro-osni akcelerometar.
- Nema standardi set IO pinova.

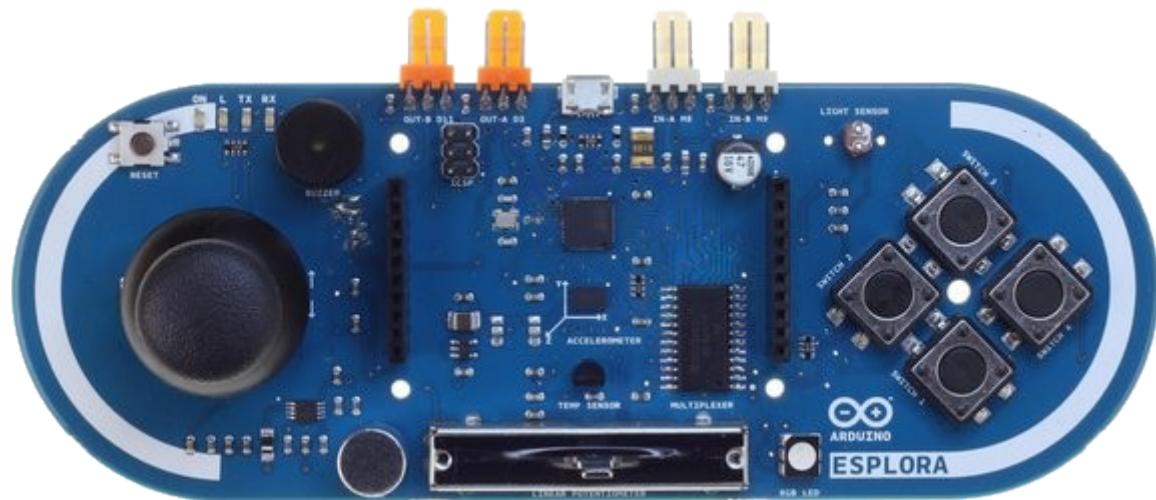

Mega

- U poređenju sa Uno, Mega:
 - Mnogo više komunikacionih pinova
 - Više memorije

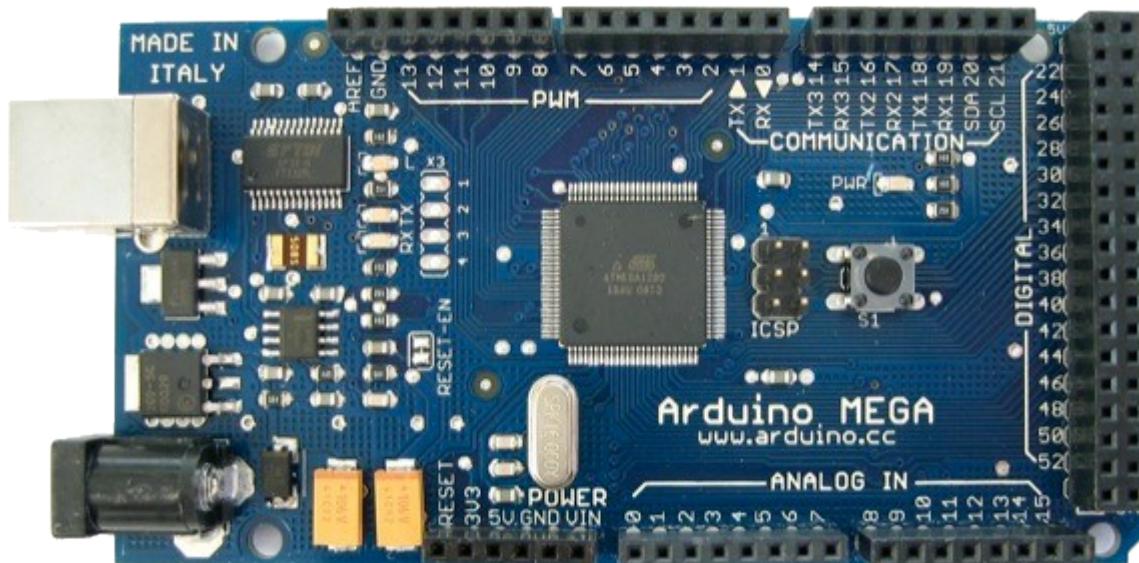


Arduino Uno


- Pinovi su grupisani u 3 grupe:
 - 14 digitalnih pinova
 - 6 analognih pinova
 - Napajanje
 - Pojavio se 2010



Arduino Uno razvojna ploča

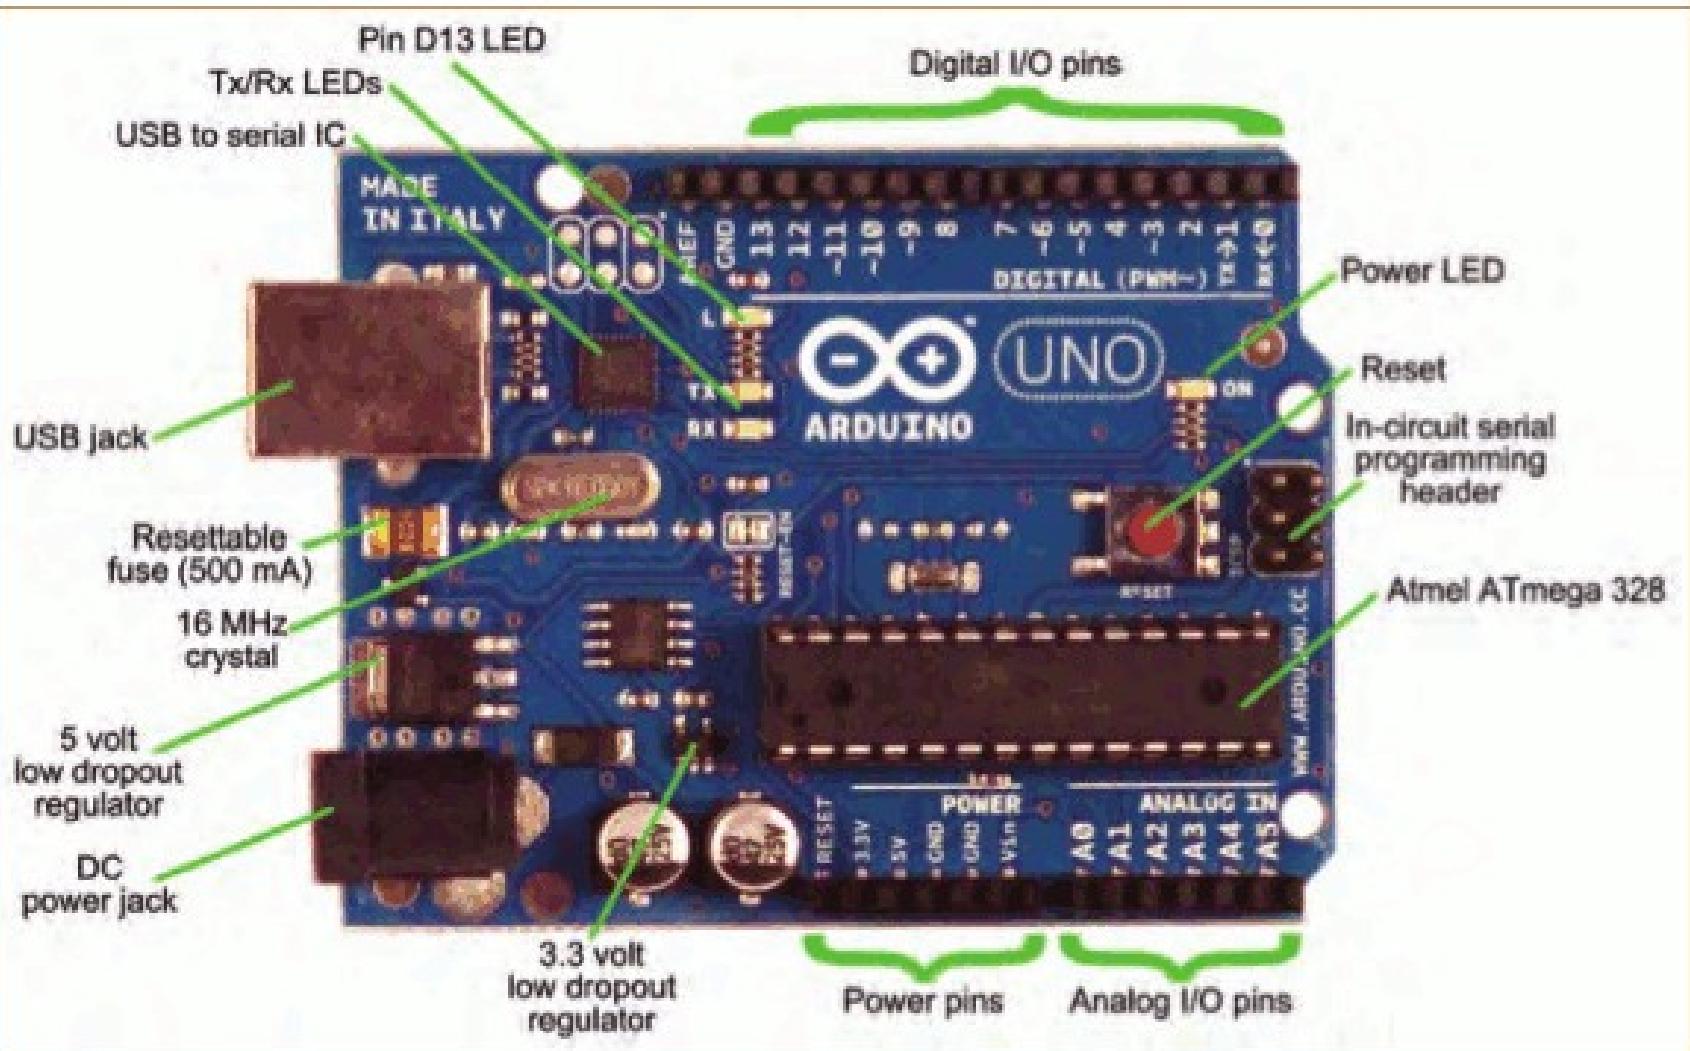

ATmega328 unutrašnja architektura

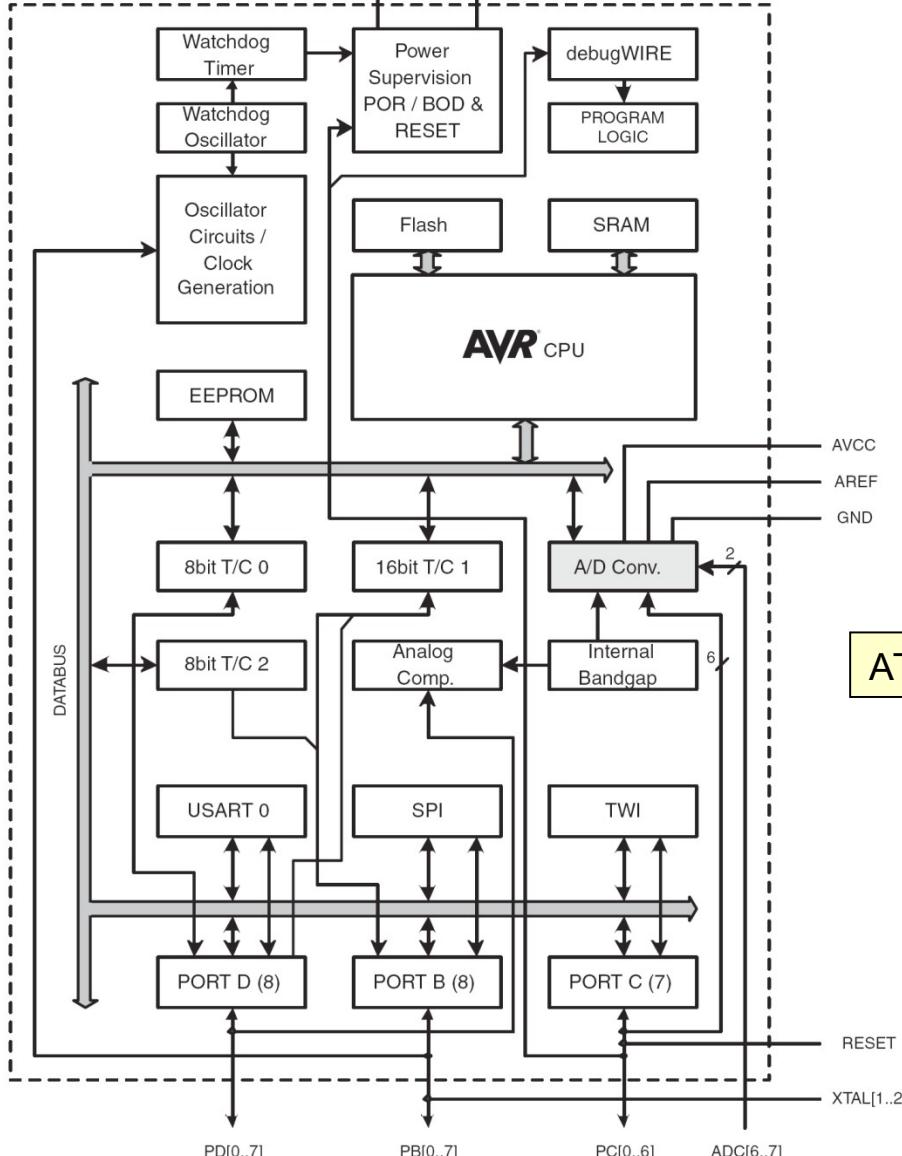

| | | | |
|-------------------------|----|----|--------------------------|
| (PCINT14/RESET) PC6 | 1 | 28 | □ PC5 (ADC5/SCL/PCINT13) |
| (PCINT16/RXD) PD0 | 2 | 27 | □ PC4 (ADC4/SDA/PCINT12) |
| (PCINT17/TXD) PD1 | 3 | 26 | □ PC3 (ADC3/PCINT11) |
| (PCINT18/INT0) PD2 | 4 | 25 | □ PC2 (ADC2/PCINT10) |
| (PCINT19/OC2B/INT1) PD3 | 5 | 24 | □ PC1 (ADC1/PCINT9) |
| (PCINT20/XCK/T0) PD4 | 6 | 23 | □ PC0 (ADC0/PCINT8) |
| VCC | 7 | 22 | □ GND |
| GND | 8 | 21 | □ AREF |
| PCINT6/XTAL1/TOSC1) PB6 | 9 | 20 | □ AVCC |
| PCINT7/XTAL2/TOSC2) PB7 | 10 | 19 | □ PB5 (SCK/PCINT5) |
| (PCINT21/OC0B/T1) PD5 | 11 | 18 | □ PB4 (MISO/PCINT4) |
| (PCINT22/OC0A/AIN0) PD6 | 12 | 17 | □ PB3 (MOSI/OC2A/PCINT3) |
| (PCINT23/AIN1) PD7 | 13 | 16 | □ PB2 (SS/OC1B/PCINT2) |
| (PCINT0/CLKO/ICP1) PB0 | 14 | 15 | □ PB1 (OC1A/PCINT1) |

ATmega328 data sheet pp. 2, 5




ATmega328 karakteristike

Features


- High Performance, Low Power AVR® 8-Bit Microcontroller
- Advanced RISC Architecture
 - 131 Powerful Instructions – Most Single Clock Cycle Execution
 - 32 x 8 General Purpose Working Registers
 - Fully Static Operation
 - Up to 20 MIPS Throughput at 20 MHz
 - On-chip 2-cycle Multiplier
- High Endurance Non-volatile Memory Segments
 - 4/8/16/32K Bytes of In-System Self-Programmable Flash program memory
 - 256/512/512/1K Bytes EEPROM
 - 512/1K/1K/2K Bytes Internal SRAM
 - Write/Erase Cycles: 10,000 Flash/100,000 EEPROM
 - Data retention: 20 years at 85°C/100 years at 25°C⁽¹⁾
 - Optional Boot Code Section with Independent Lock Bits
 - In-System Programming by On-chip Boot Program
 - True Read-While-Write Operation
 - Programming Lock for Software Security
- Peripheral Features
 - Two 8-bit Timer/Counters with Separate Prescaler and Compare Mode
 - One 16-bit Timer/Counter with Separate Prescaler, Compare Mode, and Capture Mode
 - Real Time Counter with Separate Oscillator
 - Six PWM Channels
 - 8-channel 10-bit ADC in TQFP and QFN/MLF package
 - Temperature Measurement
 - 6-channel 10-bit ADC in PDIP Package
 - Temperature Measurement
 - Programmable Serial USART
 - Master/Slave SPI Serial Interface
 - Byte-oriented 2-wire Serial Interface (Philips I²C compatible)
 - Programmable Watchdog Timer with Separate On-chip Oscillator
 - On-chip Analog Comparator
 - Interrupt and Wake-up on Pin Change
- Special Microcontroller Features
 - Power-on Reset and Programmable Brown-out Detection
 - Internal Calibrated Oscillator
 - External and Internal Interrupt Sources
 - Six Sleep Modes: Idle, ADC Noise Reduction, Power-save, Power-down, Standby, and Extended Standby
- I/O and Packages
 - 23 Programmable I/O Lines
 - 28-pin PDIP, 32-lead TQFP, 28-pad QFN/MLF and 32-pad QFN/MLF
- Operating Voltage:
 - 1.8 - 5.5V
- Temperature Range:
 - -40°C to 85°C
- Speed Grade:
 - 0 - 4 MHz @ 1.8 - 5.5V, 0 - 10 MHz @ 2.7 - 5.5V, 0 - 20 MHz @ 4.5 - 5.5V
- Power Consumption at 1 MHz, 1.8V, 25°C
 - Active Mode: 0.2 mA
 - Power-down Mode: 0.1 µA
 - Power-save Mode: 0.75 µA (Including 32 kHz RTC)

ATmega328 data sheet p. 1

Arduino Uno – električna šema

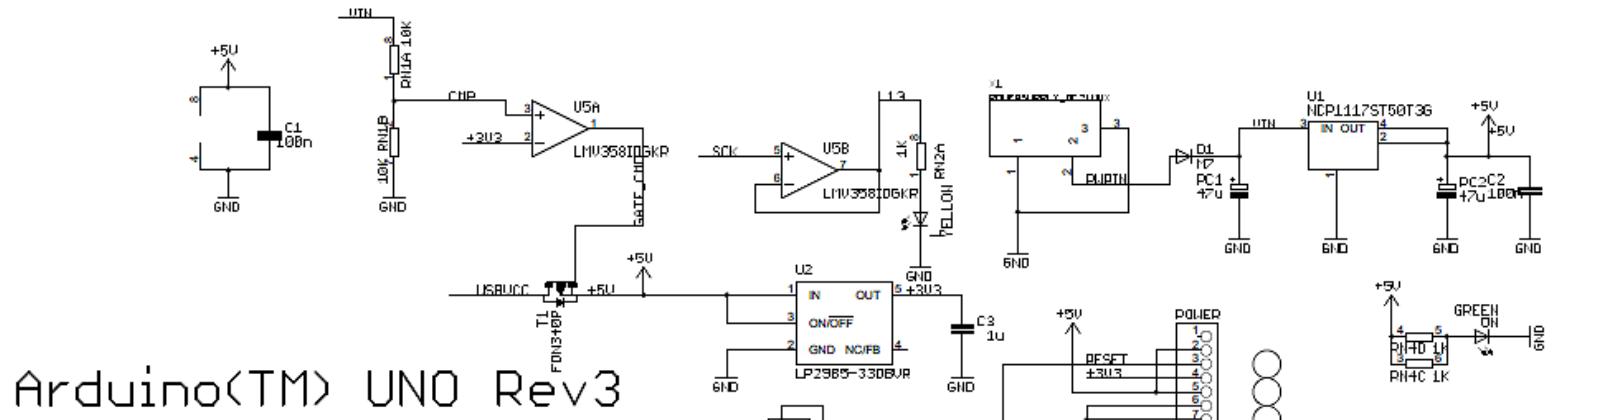

Arduino(TM) UNO Rev3

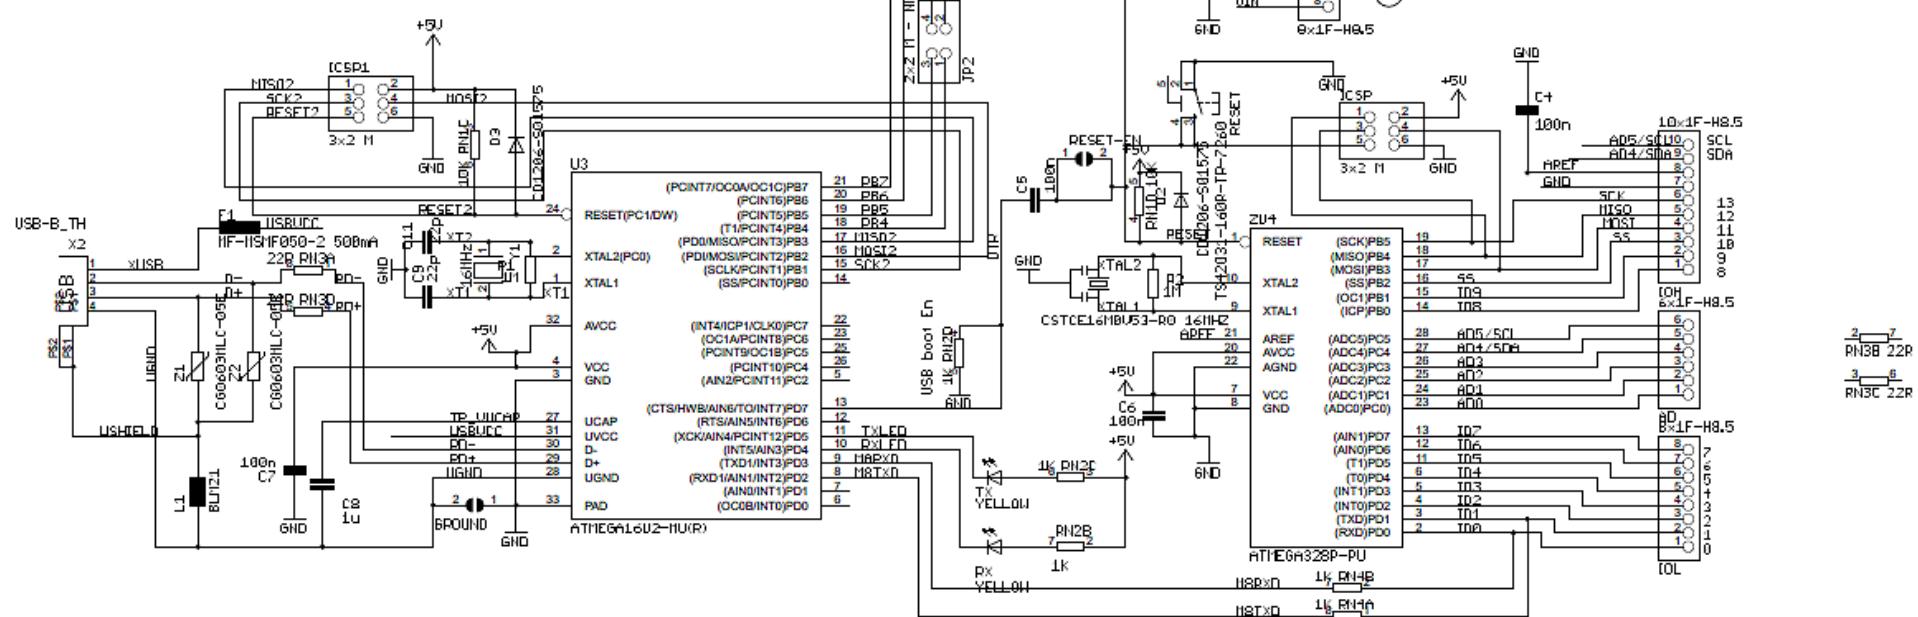

ATmega328 Microcontroller

| Naziv pina | Broj pina |
|--------------------------|-----------|
| (PCINT14/RESET) PC6 | 1 |
| (PCINT16/RXD) PD0 | 2 |
| (PCINT17/TXD) PD1 | 3 |
| (PCINT18/INT0) PD2 | 4 |
| (PCINT19/OC2B/INT1) PD3 | 5 |
| (PCINT20/XCK/T0) PD4 | 6 |
| VCC | 7 |
| GND | 8 |
| (PCINT6/XTAL1/TOSC1) PB6 | 9 |
| (PCINT7/XTAL2/TOSC2) PB7 | 10 |
| (PCINT21/OC0B/T1) PD5 | 11 |
| (PCINT22/OC0A/AIN0) PD6 | 12 |
| (PCINT23/AIN1) PD7 | 13 |
| (PCINT0/CLKO/ICP1) PB0 | 14 |
| | 28 |
| | 27 |
| | 26 |
| | 25 |
| | 24 |
| | 23 |
| | 22 |
| | 21 |
| | 20 |
| | 19 |
| | 18 |
| | 17 |
| | 16 |
| | 15 |

Absolutni maximumi

28.1 Absolute Maximum Ratings*

*NOTICE:

| | |
|--|------------------------|
| Operating Temperature | -55°C to +125°C |
| Storage Temperature | -65°C to +150°C |
| Voltage on any Pin except <u>RESET</u> with respect to Ground | -0.5V to $V_{CC}+0.5V$ |
| Voltage on <u>RESET</u> with respect to Ground..... | -0.5V to +13.0V |
| Maximum Operating Voltage | 6.0V |
| DC Current per I/O Pin | 40.0 mA |
| DC Current V_{CC} and GND Pins | 200.0 mA |


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Microcontrolerski portovi i pinovi

- Priklučci kroz koje mikrokontroler opšti sa spoljašnjom sredinom

- Pr. PORTB

- Pinovi PB0 – PB7
 - Ne moraju biti susjedni
 - Često bi-direcioni

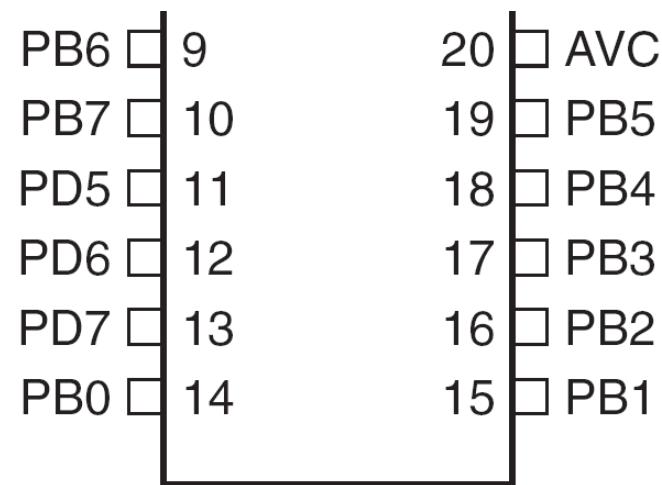


Port Pin – Usmjerenje podataka


- Ulaz
 - Kada se želi uzeti informacija iz spoljašnjeg svijeta (senzori) u MCU
- Output
 - Kada se želi izmijeniti stanje nečega **izvan** MCU (uključiti ili isključiti motor, itd.) (aktuatori)
- Po uključenju napajanja svi pinovi su ulazni.
- Program može mijenjati usmjerenja podataka za svaki pin u svakom trenutku.

ATmega328


Blok diagram

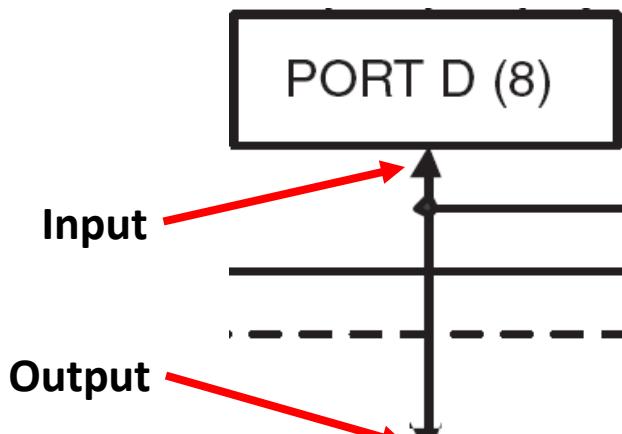

PD[0..7]

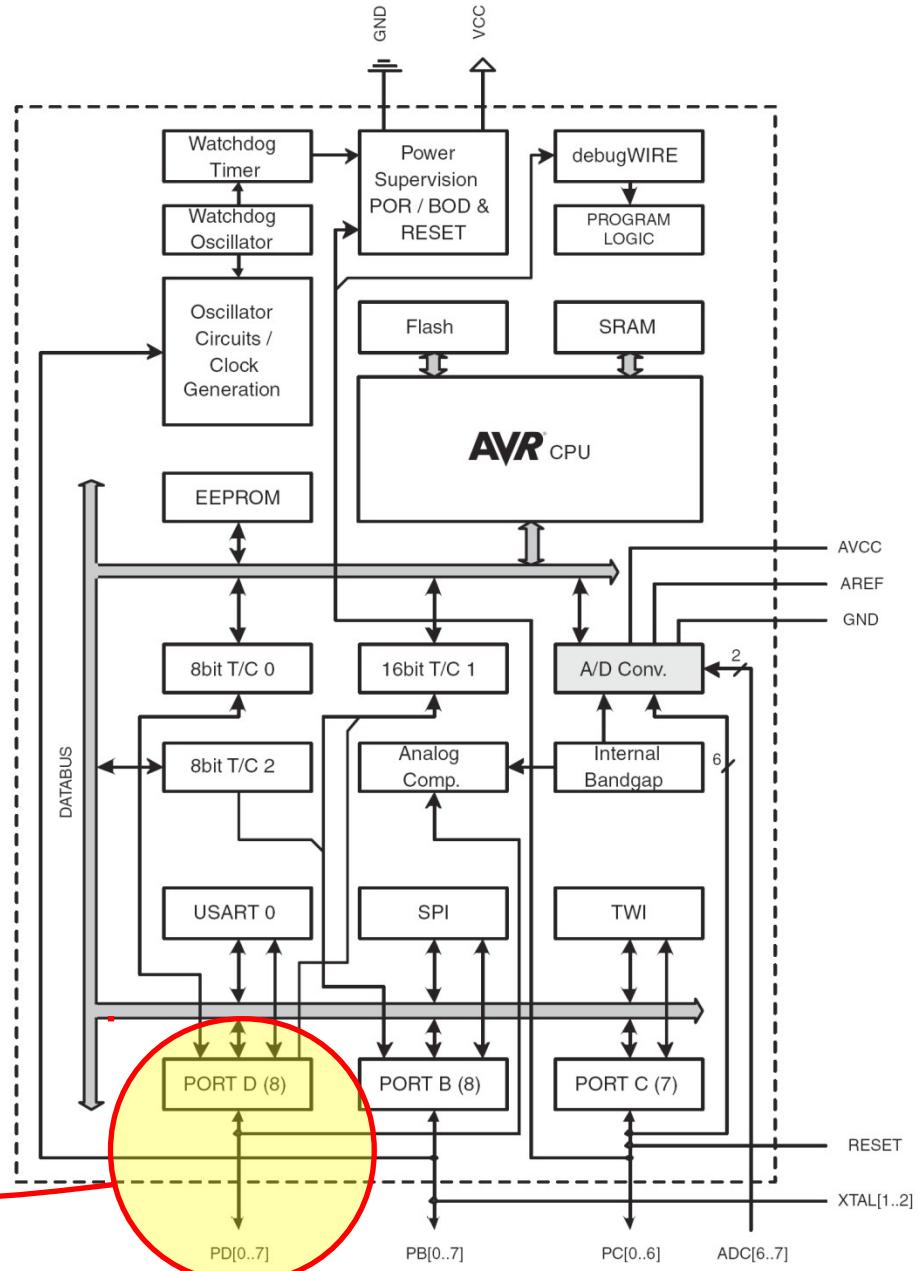

M68HC11 microkontroler

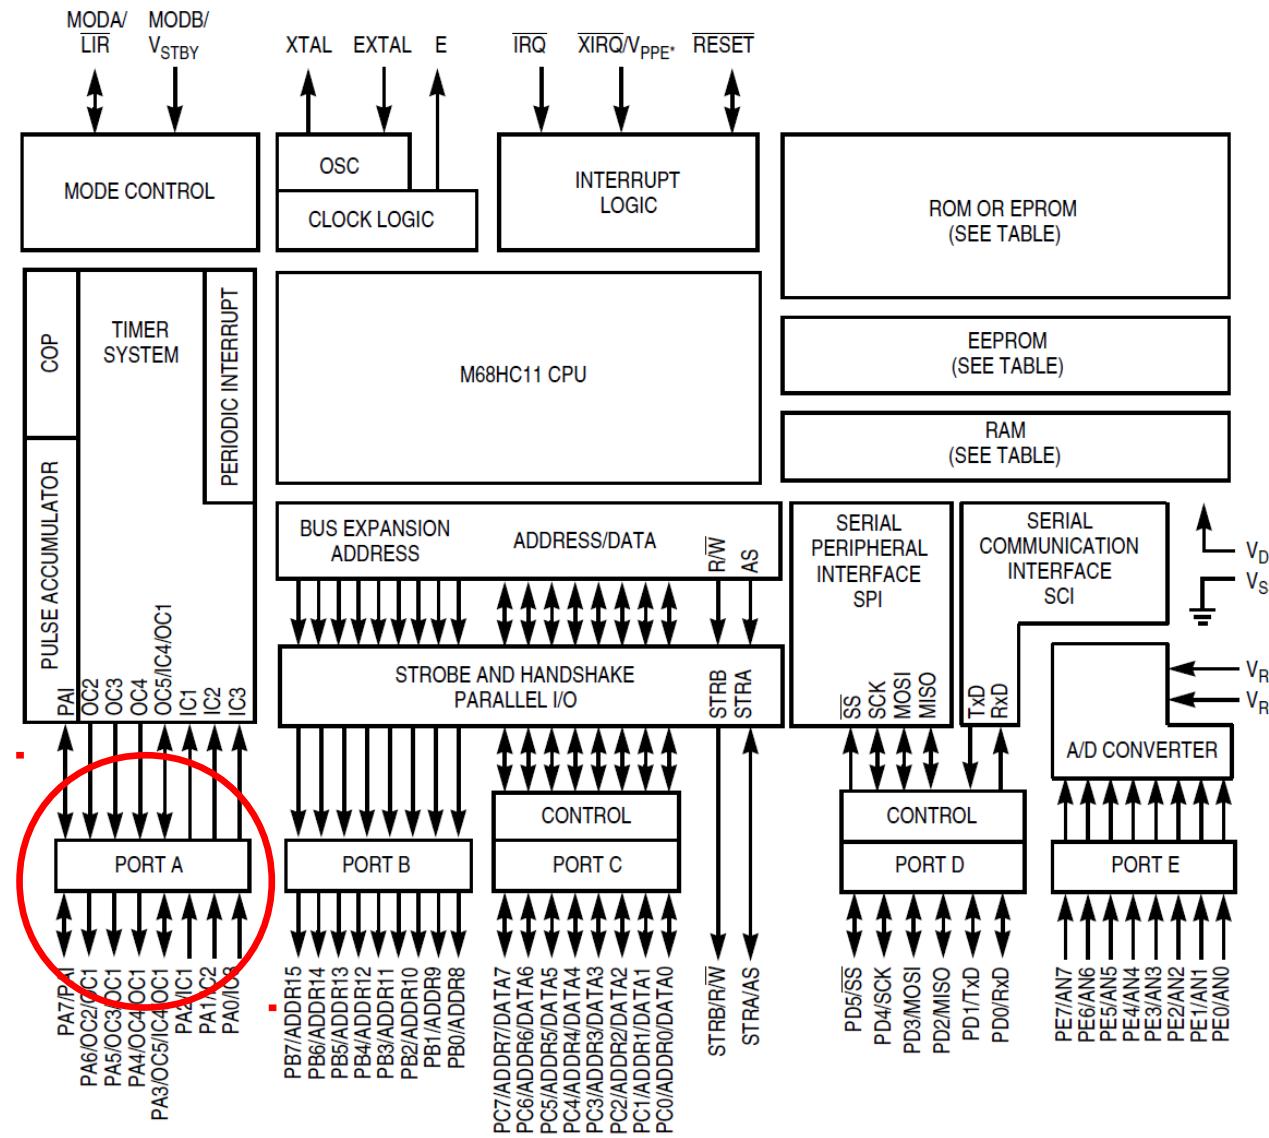

Postavljenje smjera toka podatka za pin


- Arduino
 - `pinMode(pin_no., dir)`
 - Pr. postaviti Arduino pin 3 (PD3) kao izlazni
 - `pinMode(3, OUTPUT);`
 - Napomena: jedan pin u jednom trenutku
 - Predpostavimo da se želi postaviti pinove 3, 5, i 7 (PD3, PD5, i PD7) kao izlazne?
 - Postoji li način da se oni postave istovremeno?
 - Da! Kako, slijedi kasnije...

Napon na pinu

- Mikrokontroleri su u osnovi *digitalni* uređaji.
Za digitalne ulazno/izlazne (IO) pinove:
 - Informacija je ‘kodirana’ u dva diskretna stanja:
 - HIGH or LOW (logic: 1 or 0)
 - Naponi
 - TTL
 - » 5 V (za HIGH)
 - » 0 V (za LOW)
 - 3.3 V CMOS
 - » 3.3 V (za HIGH)
 - » 0 V (za LOW)


Pin upotrijebljen kao izlazni

- Uključiti LED, koja je povezana na Arduino pin 0 (PD0) (otpornik!)
 - Koji tok podataka treba biti za pin 0 (PD0)?
 - `pinMode(____, ____);`
 - Uključenje LED
 - `digitalWrite(0, HIGH);`
 - Isključenje LED
 - `digitalWrite(0, LOW);`

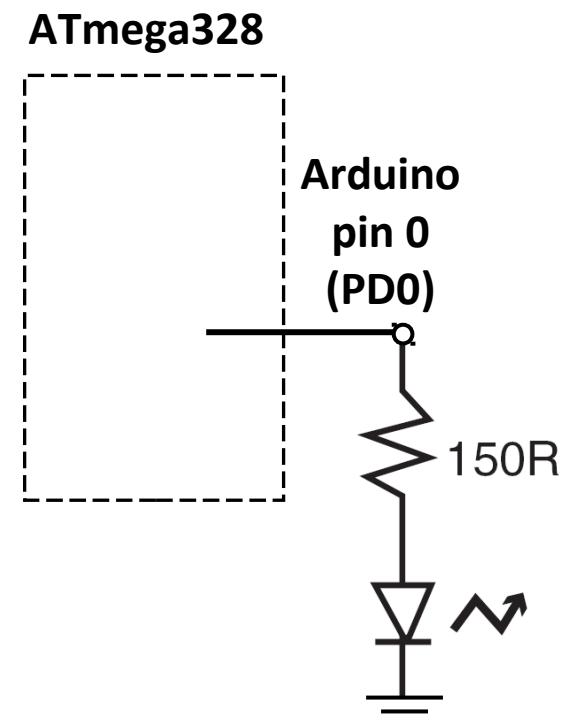

Pin kao ulazni + Pull-up otpornik

- Prekidač kao senzor
 - Pr. Senzor pojasa za sjedište u autu
 - Detekcija ***stanja prekidača***
 - Koji tok podataka treba biti za Arduino pin 3 (PD3)?
 - **pinMode (____, ____)** ;
 - Koji će biti napon na PD3 kada je prekidač zatvoren?
 - Koji će biti napon na PD3 kada je prekidač otvoren?

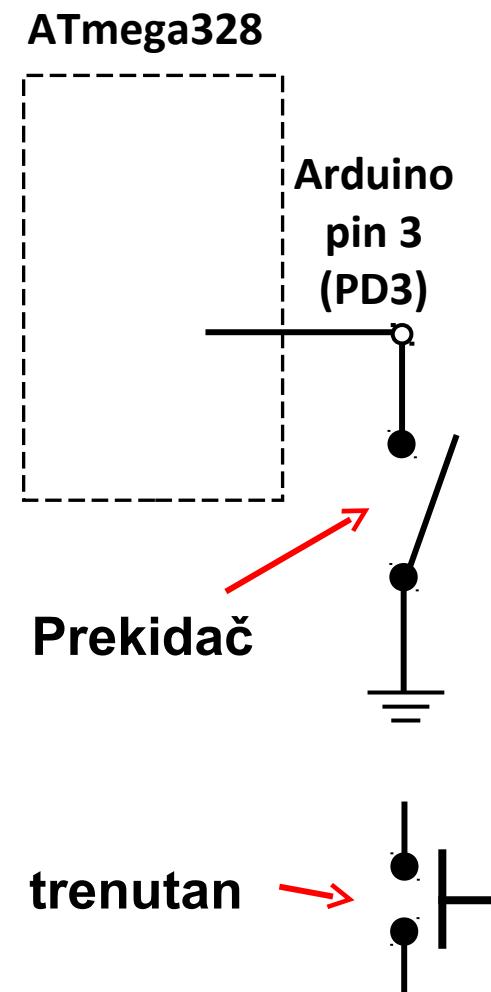


Pin kao ulazni + Pull-up otpornik

- Prekidač kao senzor, nastavak.

- Učinimo napon na pinu poznatim uključenjem pull-up otpornika za PD3

- Neka je PD3 ulazni port:
 - `digitalWrite(3, HIGH);`
uključenje "pull-up" otpornika
 - `pinMode(3, INPUT_PULLUP);`
 - Koji će napon biti na PD3 kada je prekidač otvoren?
 - Koji će napon biti na PD3 kada je prekidač zatvoren?

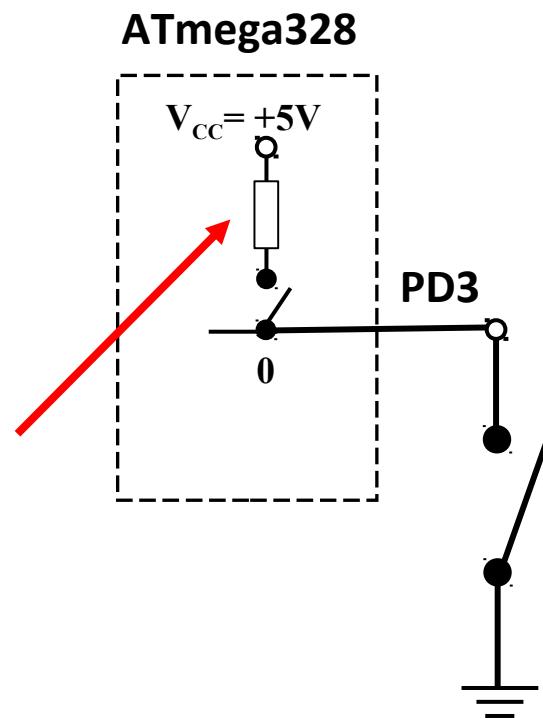


Pin kao ulazni + Pull-up otpornik

- Prekidač kao senzor, nastavak.
 - Za isključenje pull-up otpornika
 - Neka je PD3 ulazni port:

```
digitalWrite(3,LOW) ;
```

Isključuje "pull-up" otpornik

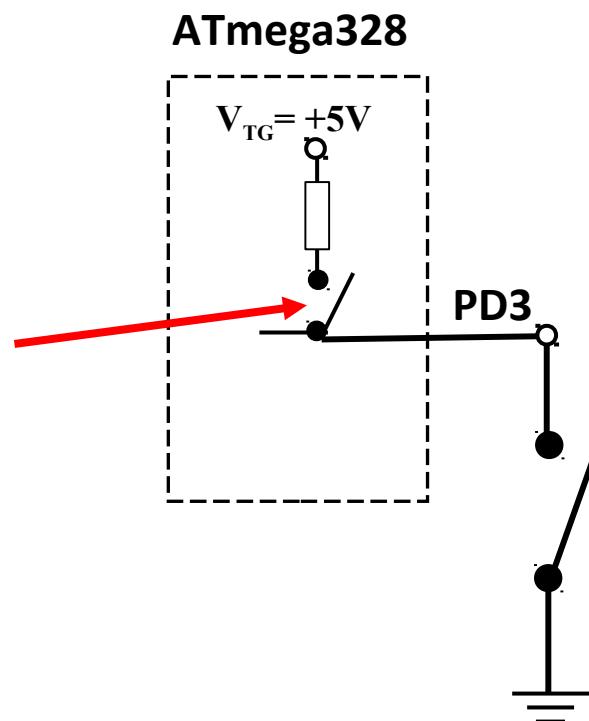

I što?

| | | | |
|--------------------------|----|----|--------------------------|
| (PCINT14/RESET) PC6 | 1 | 28 | □ PC5 (ADC5/SCL/PCINT13) |
| (PCINT16/RXD) PD0 | 2 | 27 | □ PC4 (ADC4/SDA/PCINT12) |
| (PCINT17/TXD) PD1 | 3 | 26 | □ PC3 (ADC3/PCINT11) |
| (PCINT18/INT0) PD2 | 4 | 25 | □ PC2 (ADC2/PCINT10) |
| (PCINT19/OC2B/INT1) PD3 | 5 | 24 | □ PC1 (ADC1/PCINT9) |
| (PCINT20/XCK/T0) PD4 | 6 | 23 | □ PC0 (ADC0/PCINT8) |
| VCC | 7 | 22 | □ GND |
| GND | 8 | 21 | □ AREF |
| (PCINT6/XTAL1/TOSC1) PB6 | 9 | 20 | □ AVCC |
| (PCINT7/XTAL2/TOSC2) PB7 | 10 | 19 | □ PB5 (SCK/PCINT5) |
| (PCINT21/OC0B/T1) PD5 | 11 | 18 | □ PB4 (MISO/PCINT4) |
| (PCINT22/OC0A/AIN0) PD6 | 12 | 17 | □ PB3 (MOSI/OC2A/PCINT3) |
| (PCINT23/AIN1) PD7 | 13 | 16 | □ PB2 (SS/OC1B/PCINT2) |
| (PCINT0/CLKO/ICP1) PB0 | 14 | 15 | □ PB1 (OC1A/PCINT1) |

- Pitanje od prije:
 - Postoji li način da se tok podataka postavi za više pinova istovremeno?
- Sav rad na MCU dešava se kroz *registre* (posebne memorejske lokacije)
 - Registri na Atmega328 su dužine 8-bit-a
- Data direction register (DDRx) upravlja tokom podataka za pinove u PORTx

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 | DDRB |
|---------------|------|------|------|------|------|------|------|------|------|
| 0x04 (0x24) | DDB7 | DDB6 | DDB5 | DDB4 | DDB3 | DDB2 | DDB1 | DDB0 | |
| Read/Write | R/W | |
| Initial Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 | |

Data Direction Register

- Ako je bit nula -> pin će biti ulazni
 - Postavljenje bita na nulu == ‘**čišćenje bita**’ (‘clearing the bit’)
- Ako je bit jedan -> pin će biti izlazni
 - Postavljenje bit na jedinicu == ‘**postavljanje bita**’ (‘setting the bit’)
- Za istovremenu promjenu toka podataka za više pinova koji pripadaju portu PORTx:
 1. Određivanje koje bitove treba postaviti a koje očistiti u registru DDRx.
 2. Upisati binarni (hex) broj u DDRx.

ATmega328 registri za rad sa portovima


- Vidjeti ATmega328 data sheet, pp. 76-94
- Za digitalne IO, važni registri su:
 - DDRx
 - Data Direction bit u DDRx registru (read/write)
 - PORTx
 - PORTx data register (read/write)
 - PINx
 - PINx register (read only)

Figure 13-1. I/O Pin Equivalent Schematic

PORT Pin i register detailji

ATmega328 datasheet, pp. 76-94


Figure 13-2. General Digital I/O⁽¹⁾

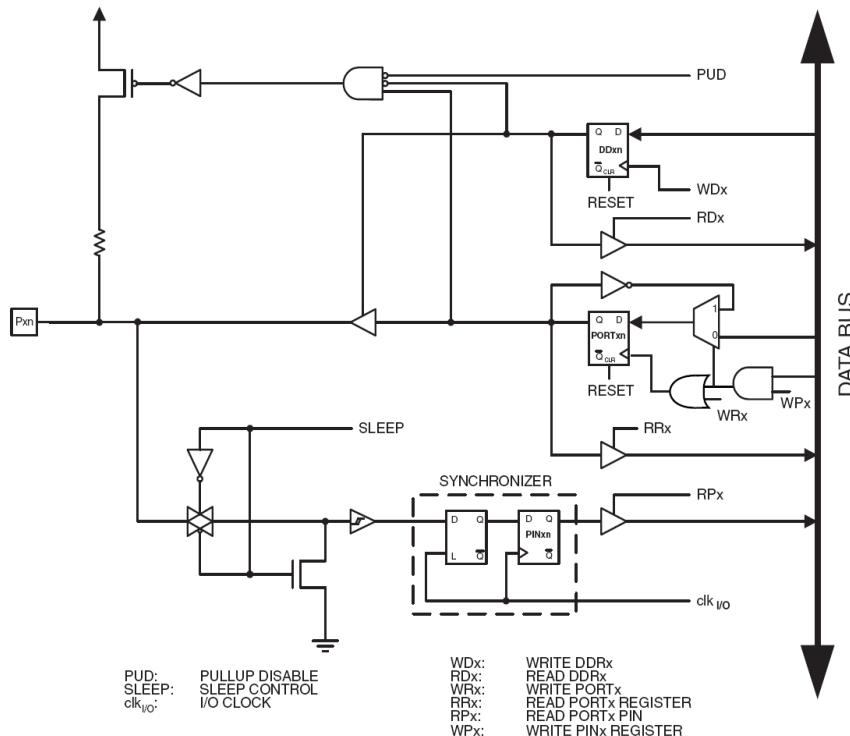

PUD:
SLEEP:
clk_{I/O}:

PULLUP DISABLE
SLEEP CONTROL
I/O CLOCK

RDx: WRITE DDRx
WRx: READ DDRx
RRx: WRITE PORTx
RPx: READ PORTx REGISTER
WPx: READ PORTx PIN
PORTD: WRITE PINx REGISTER

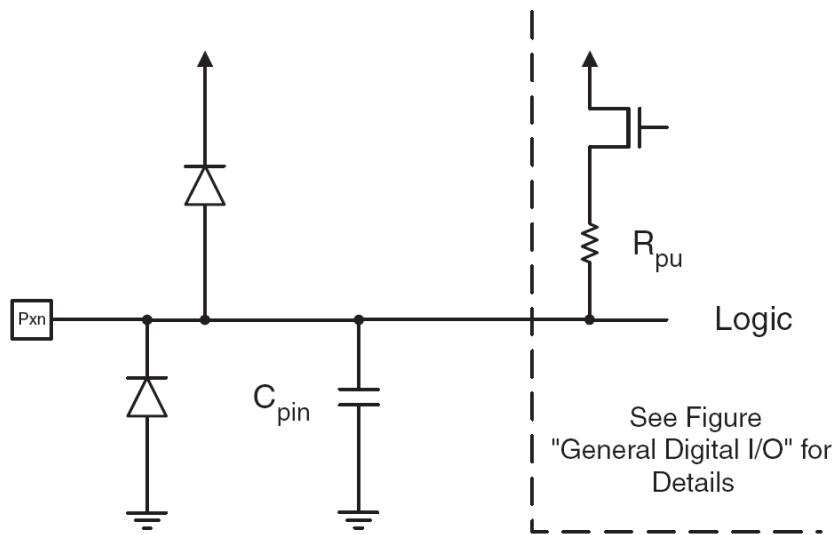

PORTD – The Port D Data Register

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0x0B (0x2B) | PORTD7 | PORTD6 | PORTD5 | PORTD4 | PORTD3 | PORTD2 | PORTD1 | PORTD0 |
| Read/Write | R/W |
| Initial Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

PORTD

DDRD – The Port D Data Direction Register

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------|------|------|------|------|------|------|------|------|
| 0x0A (0x2A) | DDD7 | DDD6 | DDD5 | DDD4 | DDD3 | DDD2 | DDD1 | DDD0 |
| Read/Write | R/W |
| Initial Value | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

DDRD

PIND – The Port D Input Pins Address

| Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|---------------|-------|-------|-------|-------|-------|-------|-------|-------|
| 0x09 (0x29) | PIND7 | PIND6 | PIND5 | PIND4 | PIND3 | PIND2 | PIND1 | PIND0 |
| Read/Write | R | R | R | R | R | R | R | R |
| Initial Value | N/A |

PIND

Jump to bits

Primjer 1

- Postaviti Arduino pinove 3, 5, i 7 (PD3, PD5, i PD7) kao izlazne

- Arduino pristup

```
pinMode(3, OUTPUT);  
pinMode(5, OUTPUT);  
pinMode(7, OUTPUT);
```


Ili ako je upotrijebljena me106.h:

```
pinMode(PIN_D3, OUTPUT);  
pinMode(PIN_D5, OUTPUT);  
pinMode(PIN_D7, OUTPUT);
```

- Alternativni pristup

DDRD = 0b10101000;

ili

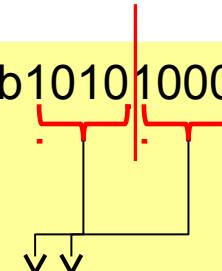

DDRD = 0xA8;

ili

DDRD |= 1<<PD7 | 1<<PD5 | 1<<PD3;

Primjer 2

- Postaviti Arduino pinove 0 i 1 (PD0 i PD1) kao ulazne, i uključiti pull-up otpornike

- Arduino pristup

```
pinMode(0, INPUT);  
pinMode(1, INPUT);  
digitalWrite(0, HIGH);  
digitalWrite(1, HIGH);
```

Ili ako je upotrijebljena me106.h:

```
pinMode(PIN_D0, INPUT);  
pinMode(PIN_D1, INPUT);  
digitalWrite(PIN_D0, HIGH);  
digitalWrite(PIN_D1, HIGH);
```

- Alternativni pristup

```
DDRD = 0; // all PORTD pins inputs  
PORTD = 0b00000011;  
ili  
PORTD = 0x03;
```


Ili još bolje:

```
DDRD &= ~(1<<PD1 | 1<<PD0);  
PORTD |= (1<<PD1 | 1<<PD0);
```

Kako startovati?



- Posjetite: <http://arduino.cc/en/Guide/HomePage>
 1. Preuzmite & instalirajte Arduino environment (IDE)
 2. Povezite ploču sa računarom pomoću USB kabla
 3. Ako je potrebno, instalirajte dodatne drajvere
 4. Pokrenite Arduino IDE
 5. Selektujte razvojnu ploču
 6. Selektujte serijski port
 7. Otvorite blink primjer
 8. Upišite program u razvojnu ploču
 - ...
 9. Pisanje vlastitog programa
 10. Nerviranje/Debagiranje/Primoravanje da radi
 11. Oduševljenje i neposredno započinjanje novog projekta
 12. (spavanje samo kad se mora)

Arduino IDE

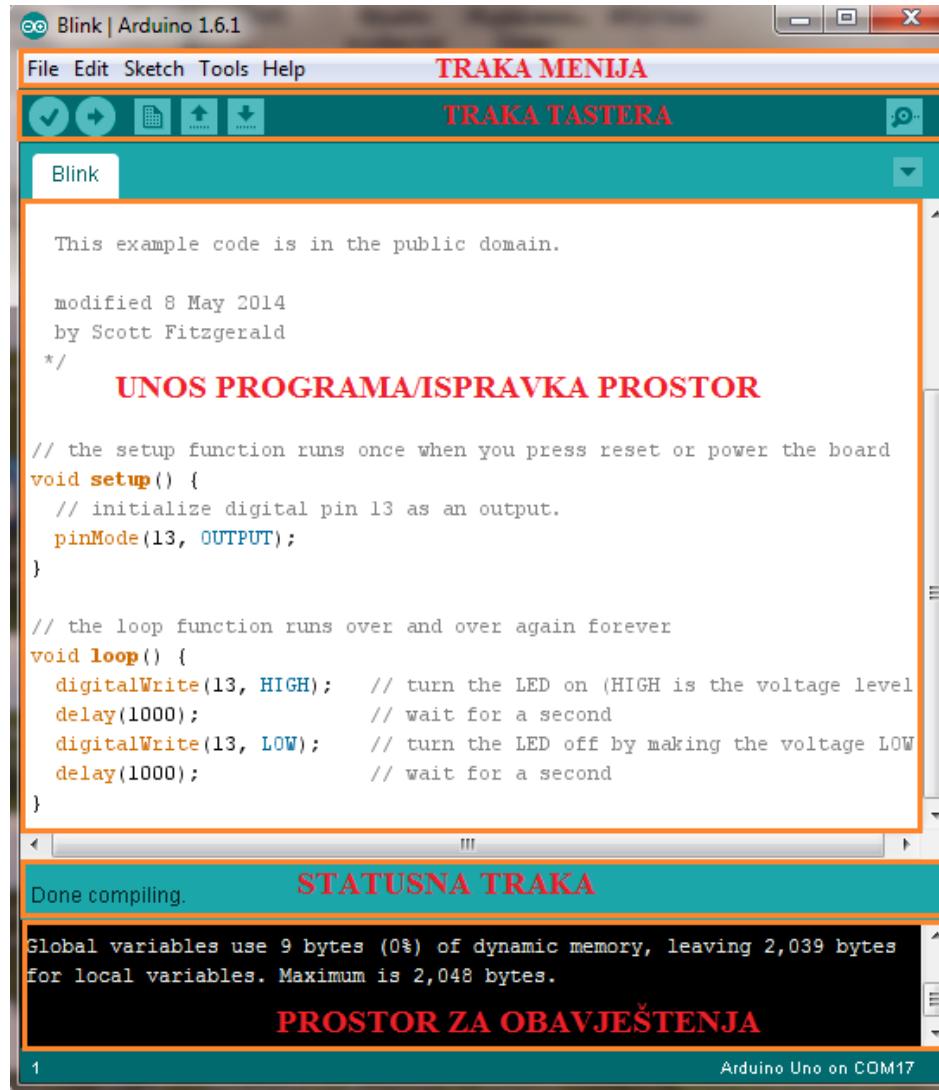

Pogledajte: <http://arduino.cc/en/Guide/Environment> za više informacija

Odaberite serijski port i ploču

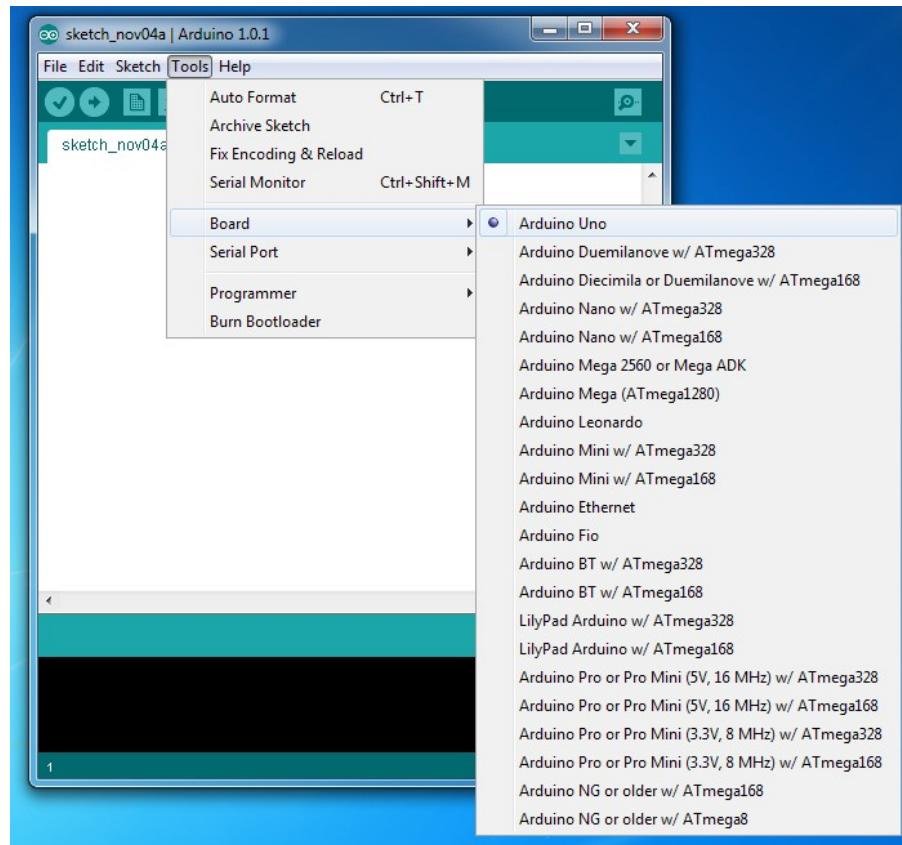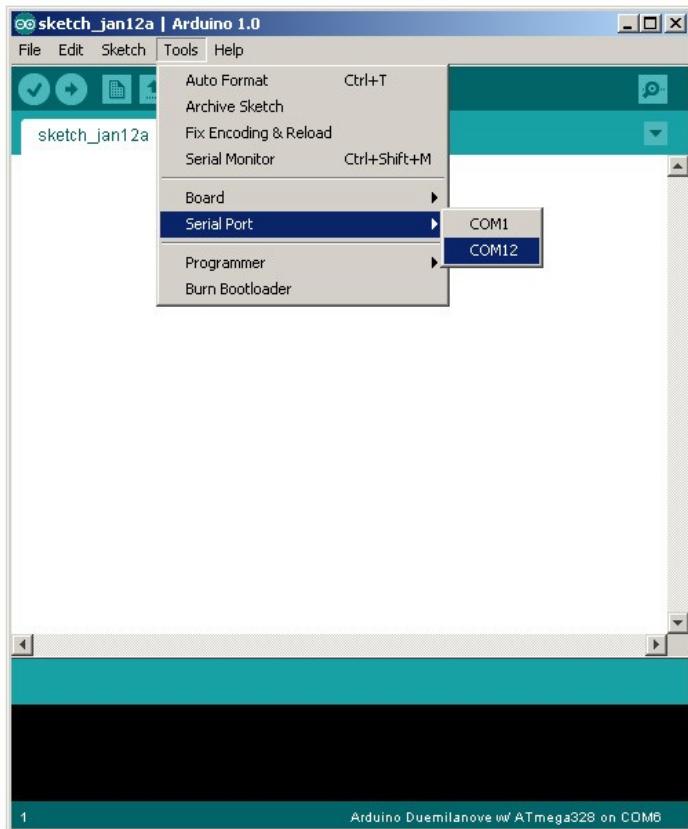

Arduino oprema

Keyes RFID Learning Module Set for Arduino



Razvoj Arduino programa

- Zasnovan na C++ bez 80% komandi.
- Pregršt novih komandi.
- Programi se nazivaju 'sketches' (skečevi, skice) .
- Skečevi obevezno sadrže dvije funkcije:
 - void setup()
 - void loop()
- setup() se pokreće prvi i samo jedanput.
- loop() se pokreće neprestano, dok se ne isključi napajanje ili se ne učita novi skeč.

Arduino C


- Arduino skečevi uglavnom upravljaju pinovima na arduino ploči.
- Arduino skečevi su uvijek petlja.
 - `void loop() {}` je isto što i `while(1) { }`

Arduino tajming

- `delay(ms)`
 - Pauza nekoliko millisekundi
- `delayMicroseconds(us)`
 - Pauza nekoliko mikrosekundi
- Više komandi:
arduino.cc/en/Reference/HomePage

Osobine kompjajlera

- Brojni jednostavni skečevi su uključeni u kompjajler
- Nalaze se pod opcijom File, Examples
- Kada je skeč napisan, može se upisati u programsku memoriju mikrokontrolera na Arduino štampanoj ploči kroz opcije File, Upload, ili pritiskom na <Ctrl> U

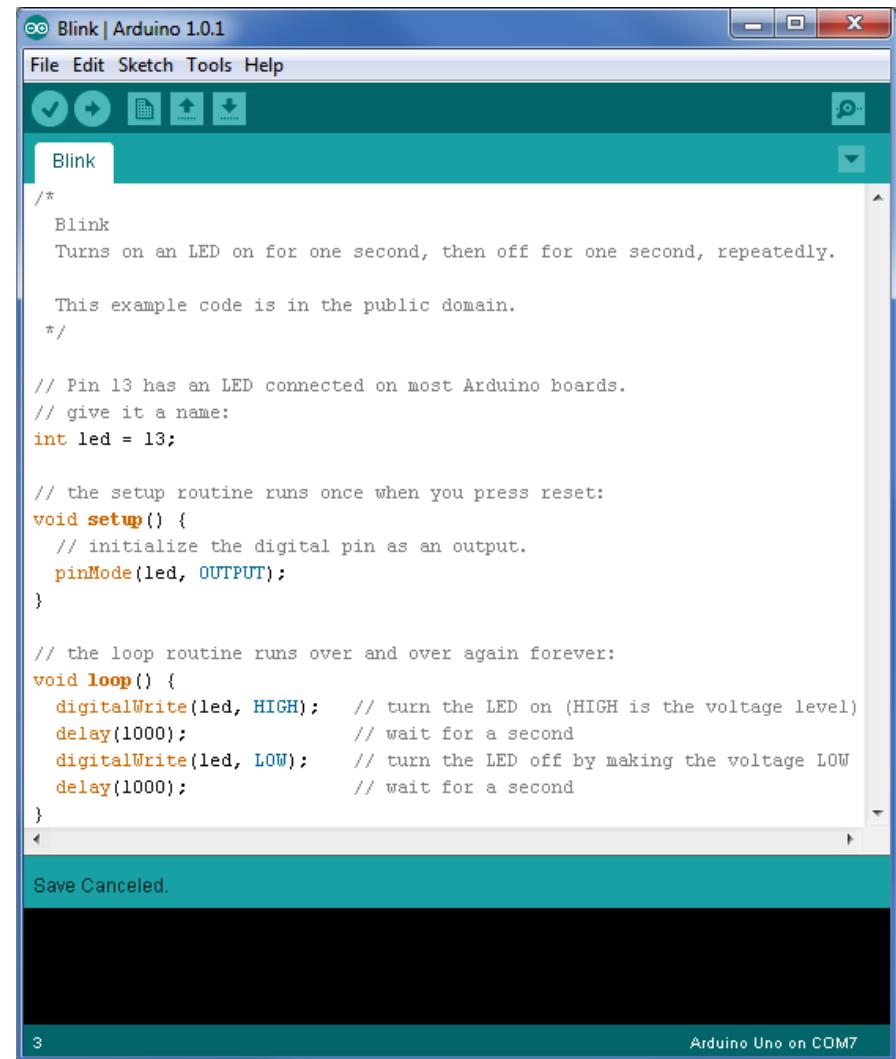

The screenshot shows the Arduino IDE interface with the title bar "Blink | Arduino 1.0.1". The menu bar includes File, Edit, Sketch, Tools, and Help. Below the menu is a toolbar with icons for Open, Save, Print, and Upload. The main area displays the "Blink" sketch code. The code is as follows:

```
/*
  Blink
  Turns on an LED on for one second, then off for one second, repeatedly.

  This example code is in the public domain.
*/

// Pin 13 has an LED connected on most Arduino boards.
// give it a name:
int led = 13;

// the setup routine runs once when you press reset:
void setup() {
  // initialize the digital pin as an output.
  pinMode(led, OUTPUT);
}

// the loop routine runs over and over again forever:
void loop() {
  digitalWrite(led, HIGH);      // turn the LED on (HIGH is the voltage level)
  delay(1000);                 // wait for a second
  digitalWrite(led, LOW);       // turn the LED off by making the voltage LOW
  delay(1000);                 // wait for a second
}
```

At the bottom of the code editor, a message says "Save Canceled." In the bottom right corner, it shows "Arduino Uno on COM7".

Arduino C je izveden iz C++

- Ovaj program radi treperenje LED na pinu 13

- avr-libc

```
#include <avr/io.h>
#include <util/delay.h>

int main(void) {
    while (1) {
        PORTB = 0x20;
        _delay_ms(1000);
        PORTB = 0x00;
        _delay_ms(1000);
    }
    return 1;
}
```

- Arduino C


```
void setup() {
    pinMode(13, OUTPUT);
}

void loop() {
    digitalWrite(13, HIGH);
    delay(1000);
    digitalWrite(13, LOW);
    delay(1000);
}
```




Prosto elektronsko kolo

- Najjednostavniji sklop.
- Uključi/isključi svjetlo.
- Struja teče iz pina (izvora napajanja), kroz potrošač (LED).

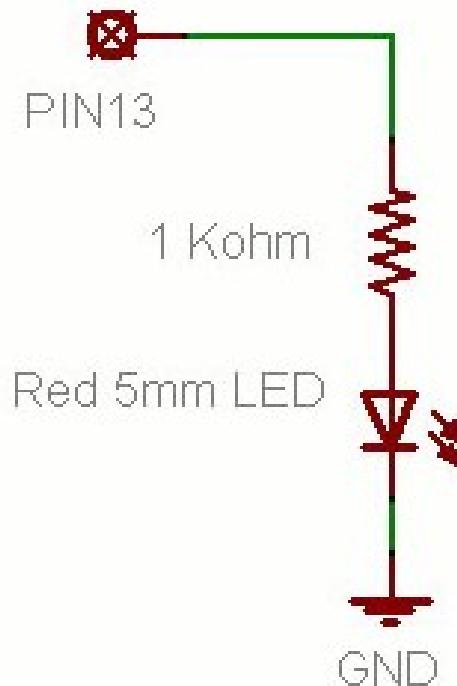


Osnovno LED kolo

- Povežite pin 13 mikrokonrolera na jedan kraj otpornika.
- Drugu nožicu otpornika spojite na dužu nožicu LED.
 - Veća otpornost znači slabije svjetlo.
 - Manja otpornost znači jače svjetlo.
 - Bez otpornosti znači pregrijevanje LED ili preopterećeње porta.
- Kraću nožicu LED spojite na negativni priključak napajanja (masu).

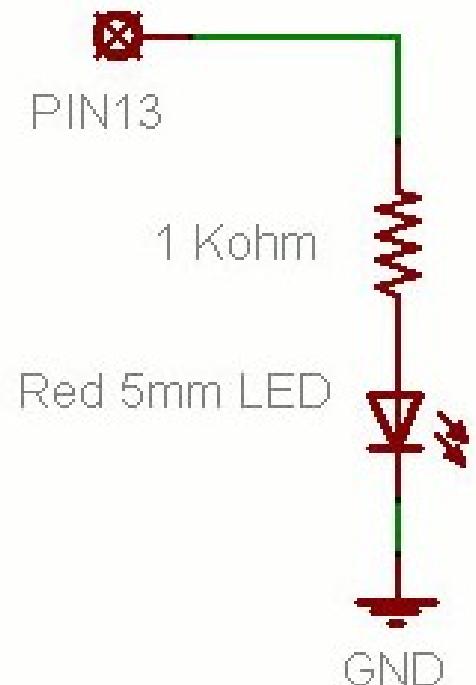

Blink Skeč (Treperenje)


- File > Examples > Digital > Blink
- LED ima polaritet
 - Negativni je indikovan zasjećenim obodom tijela diode i kraćom nožicom.

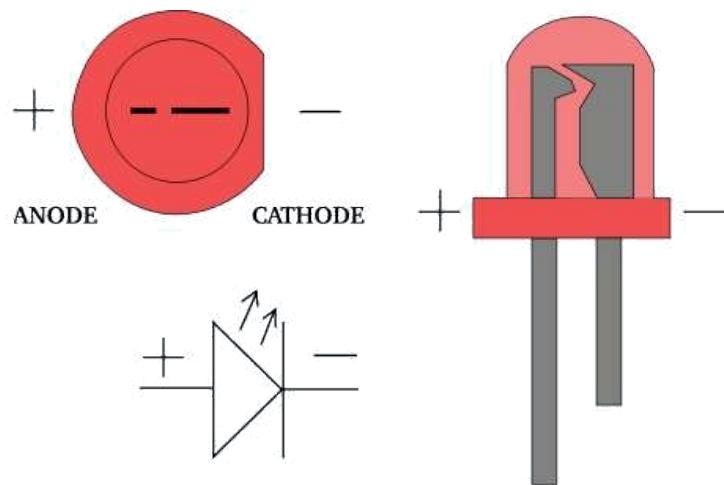

Blink Skeč (Treperenje)

```
void setup() {  
    pinMode(13, OUTPUT);  
}  
  
void loop() {  
    digitalWrite(13, HIGH);  
    delay(1000);  
    digitalWrite(13, LOW);  
    delay(1000);  
}
```

Povežite jedan kraj kola
Povežite drugi kraj kola

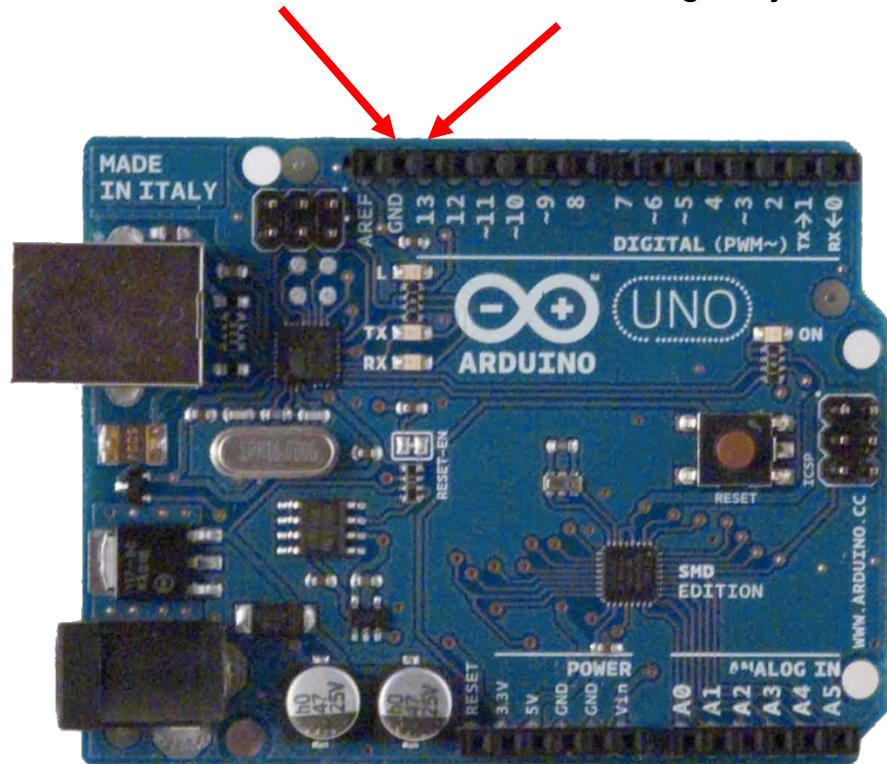

Struktura Arduino programa

- Arduino program == ‘sketch’
 - Mora imati:
 - `setup()`
 - `loop()`
 - `setup()`
 - Konfiguriše pinove i registre
 - `loop()`
 - Pokreće glavno tijelo programa neprestano
 - Kao `while(1) {...}`
 - Gdje je `main()` ?
 - Arduino uprošćava stavri
 - Odrađuje za Vas

```
/* Blink - turns on an LED for DELAY_ON msec,
then off for DELAY_OFF msec, and repeats
BJ Furman rev. 1.1 Last rev: 22JAN2011
*/
#define LED_PIN 13 // LED on digital pin 13
#define DELAY_ON 1000
#define DELAY_OFF 1000


void setup()
{
    // initialize the digital pin as an output:
    pinMode(LED_PIN, OUTPUT);
}

// loop() method runs forever,
// as long as the Arduino has power

void loop()
{
    digitalWrite(LED_PIN, HIGH); // set the LED on
    delay(DELAY_ON); // wait for DELAY_ON msec
    digitalWrite(LED_PIN, LOW); // set the LED off
    delay(DELAY_OFF); // wait for DELAY_OFF msec
}
```

Treperenje 4 LED skeč

```
void setup() {  
    pinMode(1, OUTPUT);  
    pinMode(3, OUTPUT);  
    pinMode(5, OUTPUT);  
    pinMode(7, OUTPUT);  
}
```

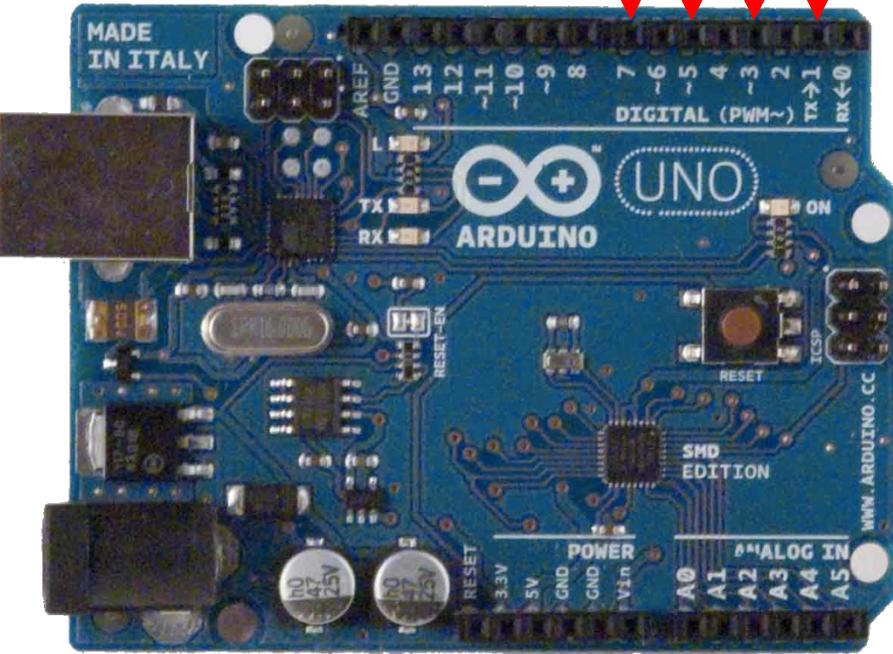


```
void loop() {  
    digitalWrite(1, HIGH);  
    delay (200);  
    digitalWrite(1, LOW);  
  
    digitalWrite(3, HIGH);  
    delay (200);  
    digitalWrite(3, LOW);  
  
    digitalWrite(5, HIGH);  
    delay (200);  
    digitalWrite(5, LOW);  
  
    digitalWrite(7, HIGH);  
    delay (200);  
    digitalWrite(7, LOW);  
}
```

I što?


- Super. Treperi svjetlo. Ništa posebno.
- Obuhvatili smo samo izlazne postove za sada.
- Možemo li upotrijebiti ulaze za detekciju fizičkih pojava?

Zadaci za vježbu 1

1. Pomocu 4 LED, u binarnom obliku prikazati vrijednost promjenjive BROJAC. Vrijednost promjenjive brojac se inkrementira svake sekunde. **(2 poena)**
2. Trcece svjetlo upotrebom 4 LED. Uvijek je samo jedna dioda uključena. **(3 poena)**

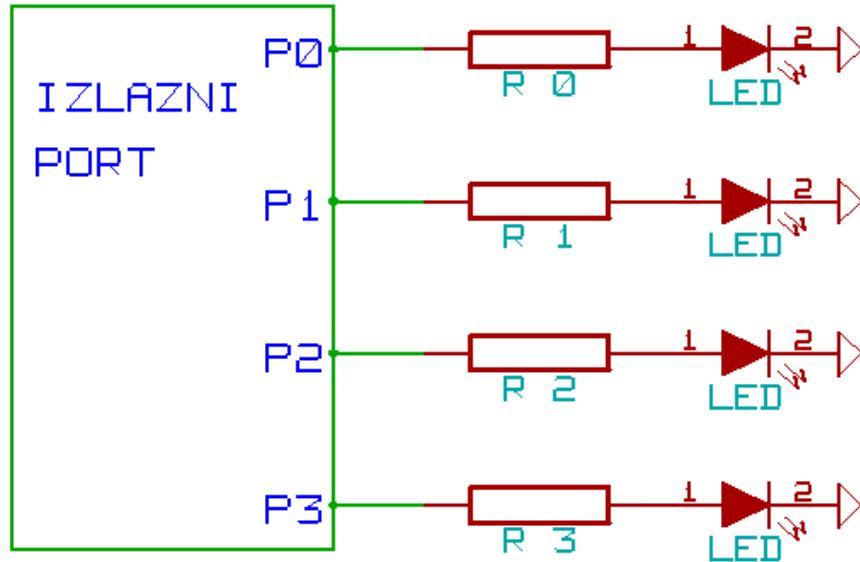

3. Napisati program koji broji od 0 do 9, s ponavljanjem, i prikazuje rezultat na sedmosegmentnom LED displeju. (4 poena)

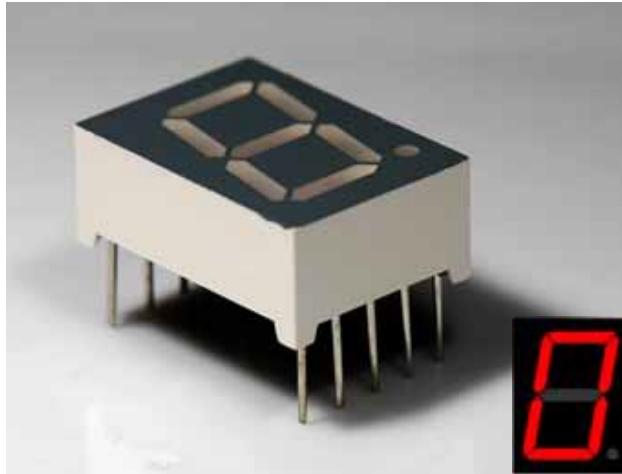

Pomoć:


Razmotrite pisanje funkcije:

```
void writeDigit(int n)
```


koja ispisuje jednu cifru

Transformaciona tabela


| Digit | ABCDEFG | A | B | C | D | E | F | G |
|-------|---------|-----|-----|-----|-----|-----|-----|-----|
| 0 | 0x7E | on | on | on | on | on | on | off |
| 1 | 0x30 | off | on | on | off | off | off | off |
| 2 | 0x6D | on | on | off | on | on | off | on |
| 3 | 0x79 | on | on | on | on | off | off | on |
| 4 | 0x33 | off | on | on | off | off | on | on |
| 5 | 0x5B | on | off | on | on | off | on | on |
| 6 | 0x5F | on | off | on | on | on | on | on |
| 7 | 0x70 | on | on | on | off | off | off | off |
| 8 | 0x7F | on |
| 9 | 0x7B | on | on | on | on | off | on | on |





4. Napisati program koji na četvorocifarskom sedmosegmentnom LED displeju ispisuje: '432.1', i to nasljedeći način: najprije ispise samo prvu cifru slijeva, zadrži dva sekunda, ispiše prvu i drugu , zadrži 2 sekunda, itd. Na kraju ispiše sve 4 cifre i zadrži 5 sekundi.
(6 poena)

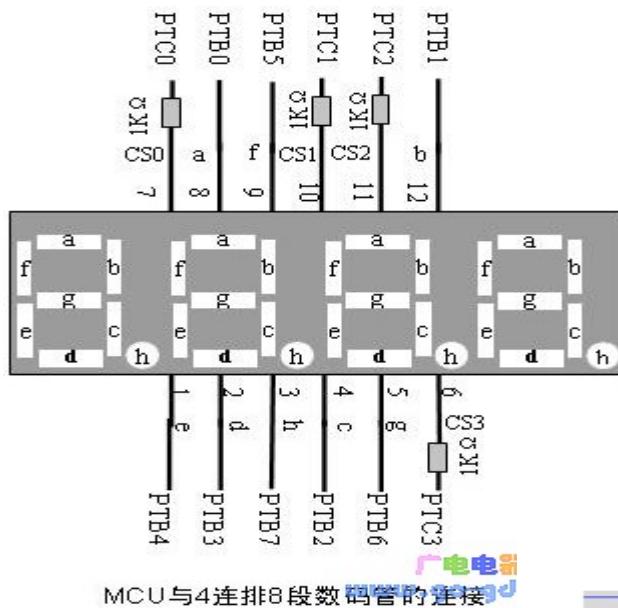

MCU与4连排8段数码管的连接

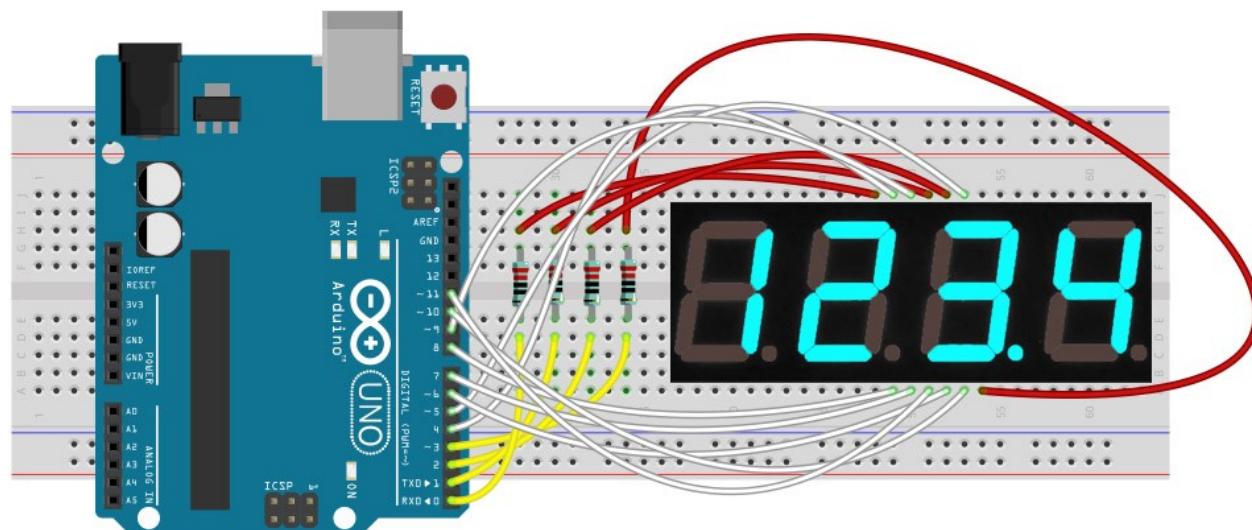

5. Napisati program koji na 8X8 matrix LED displeju ispisuje cifre od 0 do 9, stalno u krug. Pojedina cifra se na displeju zadržava dvije sekunde. (8 poena)

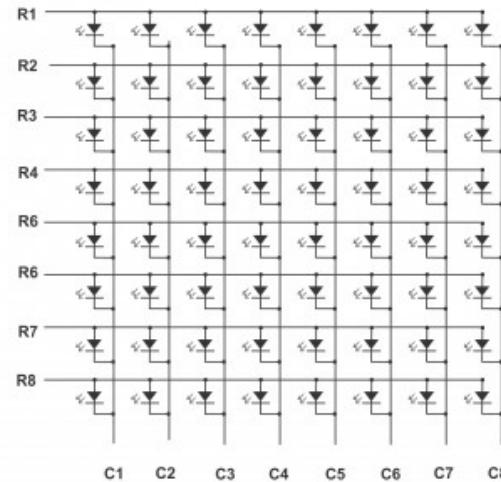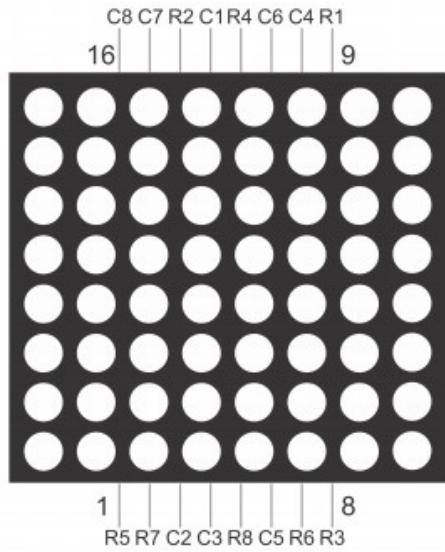

Kraj